

- Three foot (930mm) tall, 12.1" (306 mm) wide, four port antenna with a 65° azimuth beamwidth covering 1710-1880 MHz frequencies
- Innovative RF Connector design which allows for blind mate connections with an IP67 rating on all connections. Ideal for Integrated Antenna/Radio attachments
- Blind Mate connector design allows for easy RRU field replacements, without taking down the antenna or replacing the whole assembly
- Integrated Blind Mate Connector design is RRU specific
- LTE Optimized FBR and SPR performance, providing for an efficient use of valuable radio capacity
- LTE Optimized Boresight and Sector XPD and USL performance, essential for LTE Performance
- Exceeds minimum PIM performance requirements
- Equipped with new Blind Mate 4.3-10
- Equipped with one Internally Integrated RET Controller (Type 17)

Overview

The CCI Integrated Radio Series Antenna is a four port antenna, with four mid-band ports covering 1710-1880 MHz. The CCI Integrated Radio Series Antenna provides the capability to deploy 4x4 Multiple-Input Multiple-Output (MIMO). The CCI Integrated Radio Series antenna single RET configuration tilts all four ports together, allowing for electrical downtilt uniformity across all four ports.

CCI antennas are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

Applications

- 4x4 MIMO for the high band
- Integrated Blind Mate 4.3-10 DIN connectors, with IP67 rating
- With CCI's Integrated Radio Series Antenna, wireless providers can reduce tower load, lease expense, deployment time and installation costs



SPECIFICATIONS

Quad Port High-Band Antenna

QPA65R-W3B

Electrical Antenna

Ports	4 x High Band Ports for 1710-1880 MHz
Frequency Range	1710-1880 MHz
Gain	16.0 dBi
Gain (Average)	15.3 dBi
Azimuth Beamwidth (-3dB)	65°
Elevation Beamwidth (-3dB)	9.9°
Electrical Downtilt	0° to 10°
Elevation Sidelobes (1st Upper)	< -17 dB
Front-to-Back Ratio @180°	> 35 dB
Cross-Polar Discrimination (at Peak)	> 20 dB
Cross-Polar Port-to-Port Isolation	> 25 dB
Voltage Standing Wave Ratio(VSWR)	< 1.5:1
Passive Intermodulation (2x20W)	≤ -153 dBc
Input Power Continuous Wave (CW)	300 watts
Polarization	Dual Pol 45°
Input Impedance	50 ohms
Lightning Protection	DC Ground

Electrical Filter

Specification	Frequency	Value
Pass Band Loss	1710-1785 MHz	< 0.2 dB
	1805-1860 MHz	< 0.25 dB
	1860-1880 MHz	0.6 dB average (< 1.5±0.3 dB @1880)
Rejection Band*	1884.5-1915.85 MHz	70 dB
Pass Band Return Loss	1710-1880 MHz	> 18 dB
Isolations between Filters	1710-1880 MHz	> 40 dB
Group Delay Distortion	1710-1785 MHz	10 nS Max
	1805-1880 MHz	15 nS average (200 nS Max @1880)
Passive Intermodulation (2x20W)		≤ -153 dBc
Input Impedance		50 ohms
Operating Temperature		-40° C to +55° C

* When Cascaded with Nokia RRU Filter



SPECIFICATIONS

Quad Port High-Band Antenna

QPA65R-W3B

Mechanical

Dimensions (LxWxD)	36.6x12.0x5.6 in (930x304x143 mm)
Survival Wind Speed	> 201 mph (> 90 m/s)
Front Wind Load	95 lbs (425 N) @ 100 mph (161 kph)
Side Wind Load	50 lbs (225 N) @ 100 mph (161 kph)
Front Wind Load	386 lbs (1715 N) @ 201 mph (324 kph)
Side Wind Load	204 lbs (907 N) @ 201 mph (324 kph)
Equivalent Flat Plate Area	3.7 ft ² (0.3 m ²)
QPA65R-W3BA Weight*	66.8 lbs (30.3 kg)
QPA65R-W3BB Weight**	32.0 lbs (14.5 kg)
Connector	4 x custom blind-mate 4.3-10 connectors
Mounting Pole	3.5 to 4.5 in (89.1 to 115 mm)


* Weight excludes mounting

** Weight excludes mounting, radio interconnect parts and radio

Rear View

QPA65R-W3BA

QPA65R-W3BB

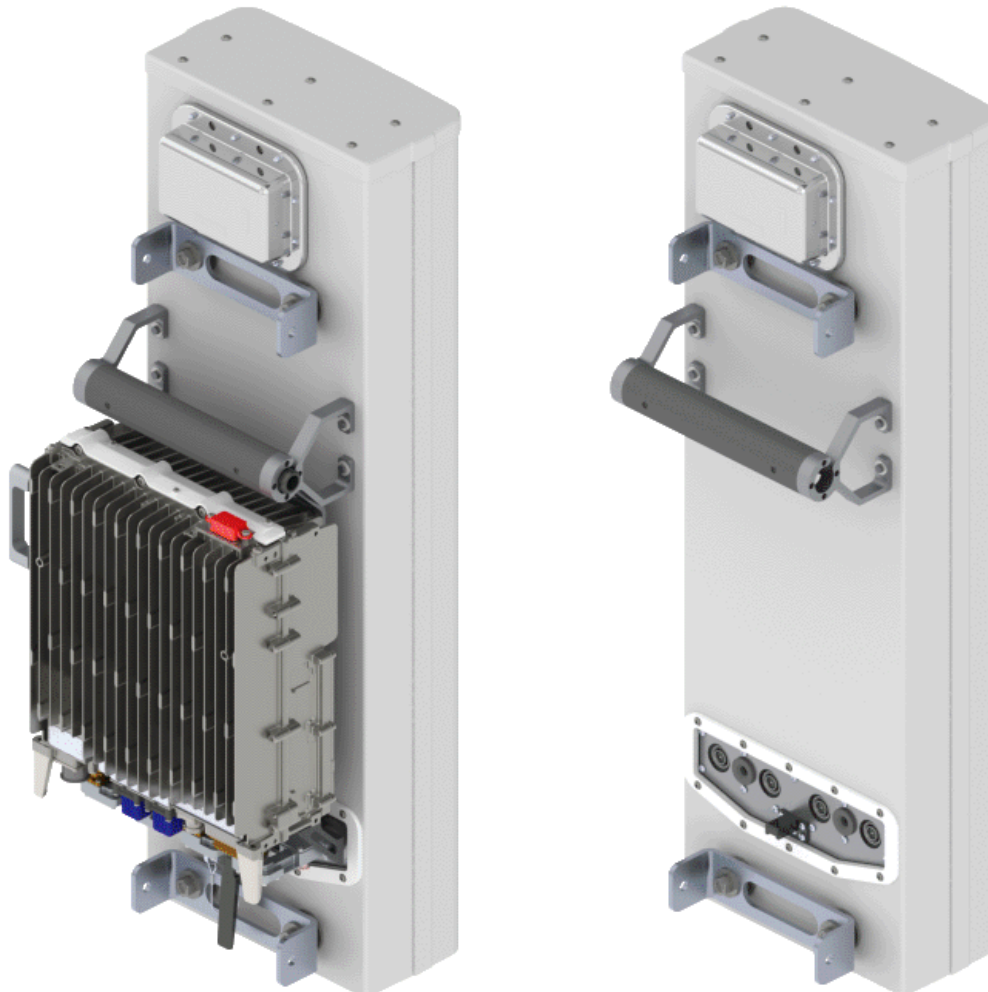



SPECIFICATIONS


Quad Port High-Band Antenna

QPA65R-W3B

Mechanical

Bottom View

QPA65R-W3B w/o RRH

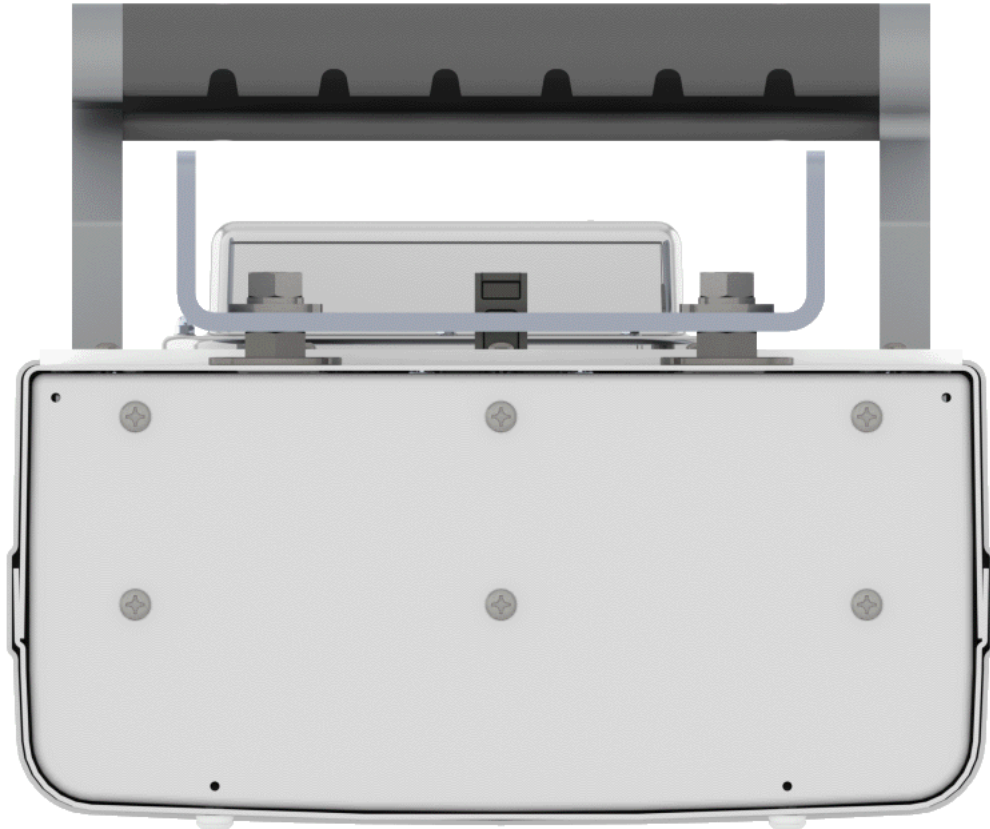



Quad Port High-Band Antenna

QPA65R-W3B

SPECIFICATIONS


Mechanical

RET/Element Configuration

QPA65R-W3B

Element arrays as viewed from rear of antenna

RET placement as viewed from rear of antenna

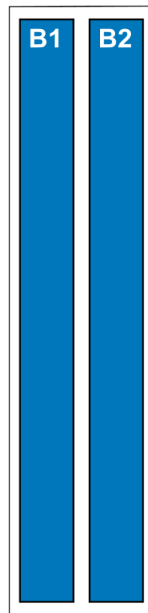

Top of antenna



MM.1

Array	Ports	Freq (MHz)	Ports controlled by common RET	AIISG RET UID
B1	1, 2	1710-1880	1, 2, 3, 4	C1xxxxxxMM.1
B2	3, 4	1710-1880		




Quad Port High-Band Antenna


QPA65R-W3B

Typical Antenna Patterns


For detailed information on additional antenna patterns, contact customer support at support@cciproducts.com

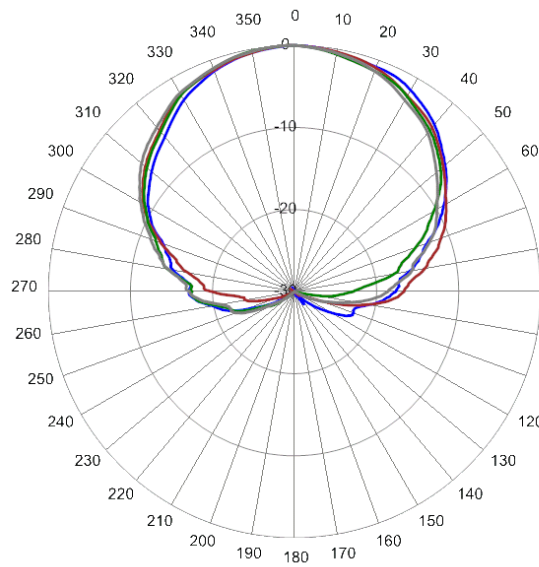


1720 MHz Azimuth

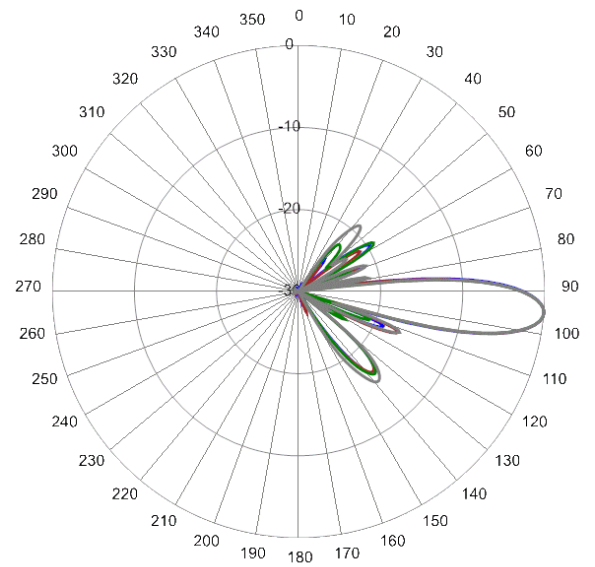

1720 MHz Elevation 5°

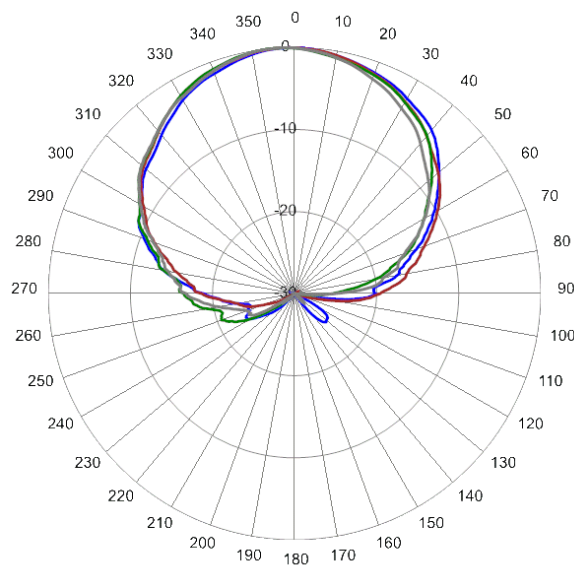

1850 MHz Azimuth & Elevation 5°

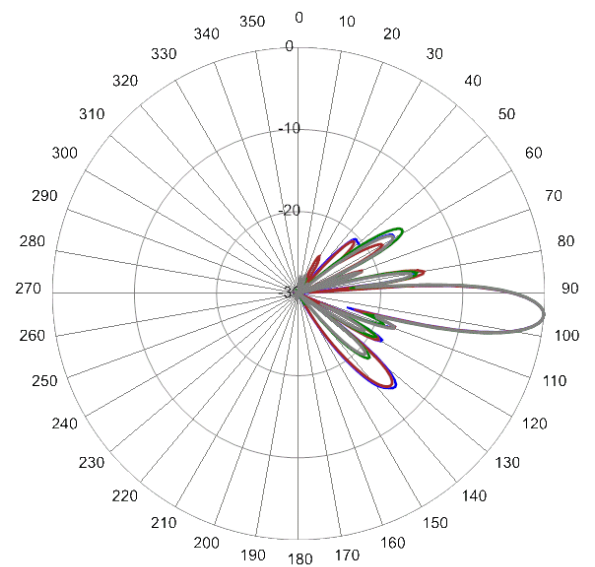

1850 MHz Azimuth & Elevation 5°



Quad Port High-Band Antenna

QPA65R-W3B

Parts & Accessories

QPA65R-W3BA	Three foot (0.9 m) QuadPort antenna with 65° azimuth beamwidth, 4.3-10 female connectors, 1 factory installed BSA-RET400 RET actuator (Type 17 Internal) and Nokia Radio Interconnect Assembly (RM-02)
QPA65R-W3BB	Three foot (0.9 m) QuadPort antenna with 65° azimuth beamwidth, 4.3-10 female connectors, 1 factory installed BSA-RET400 RET actuator (Type 17 Internal) without Nokia Radio Interconnect Assembly (RM-02)
MBK-19	Single antenna mounting bracket kit (top and bottom) with 0° to 20° mechanical downtilt adjustment and $\pm 30^\circ$ of azimuth swing adjustment
MBK-20	Dual antenna mounting bracket kit (top and bottom) with 0° to 20° mechanical downtilt adjustment and $\pm 30^\circ$ of azimuth swing adjustment
MBK-21	Tri antenna mounting bracket kit (top and bottom) with 0° to 20° mechanical downtilt adjustment and $\pm 30^\circ$ of azimuth swing adjustment
RM-02	Radio Interconnect Manifold and Mounting components
BSA-RET400	Type 17 Internal Remote Electrical Tilt System (RET)





Mounting Bracket Kit

MBK-19

Mechanical

Weight	26.5 lbs (12.0 kg)
Hinge Pitch	27.6 in (700 mm)
Mounting Pole Dimension	3.5 to 4.5 in (89.1 to 115 mm)
Fastener Size	M10 HHC Screw, DIN 933, ISO 4017 M12 Hex Nut, DIN 934, ISO 4032
Installation Torque	M10-18 ft·lbs (25 N·m), M12-40 ft·lbs (54 N·m)
Maximum Static Load	170.9 lbs (77.5kg)
Mechanical Tilt	0° to 20°

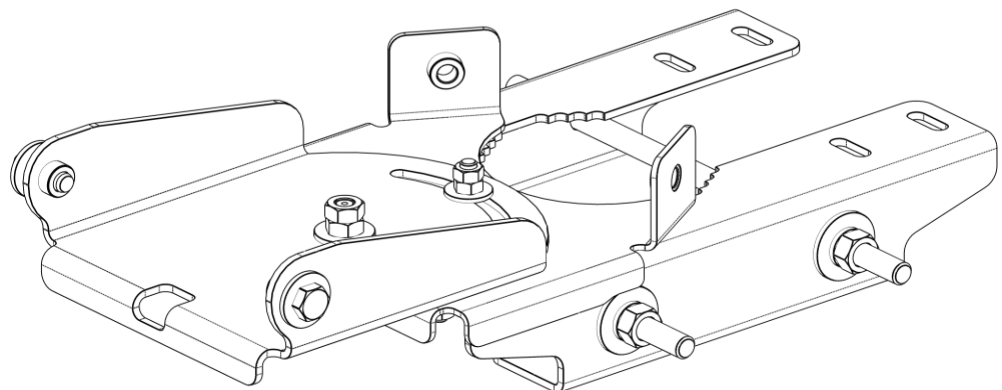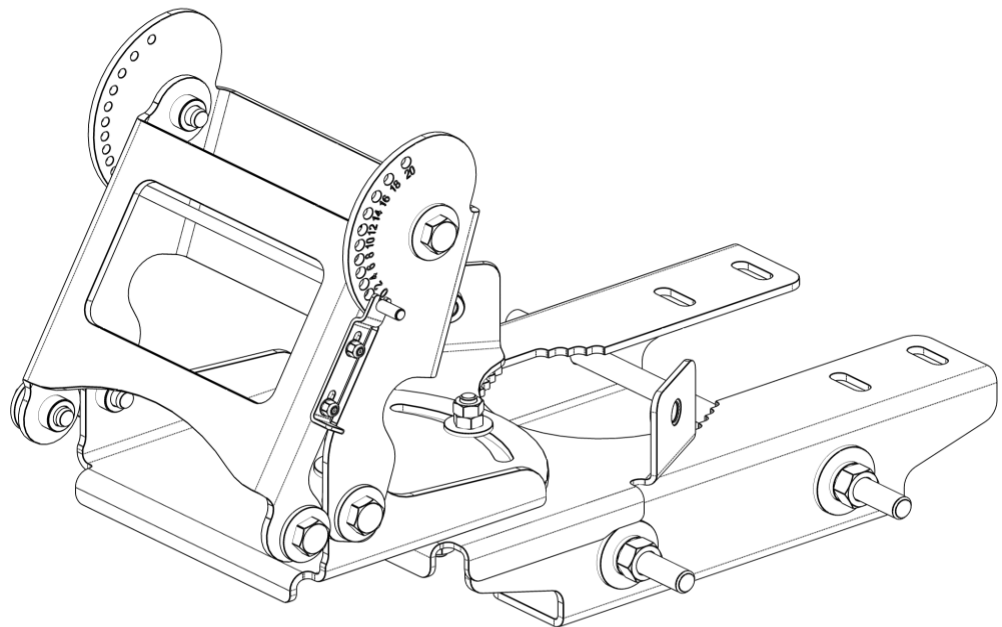


MBK-19



Mechanical

QPA65R-W4B ANTENNA DISTANCE FROM POLE BASED ON THE MECHANICAL TILT SETTING

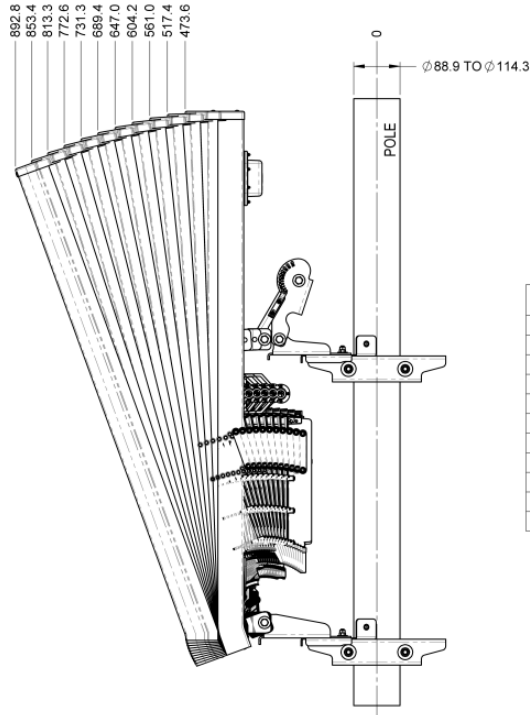

MECHANICAL TILT (°)	DISTANCE FROM POLE φ
0	473.6
2	517.4
4	561.0
6	604.2
8	647.0
10	689.4
12	731.3
14	772.6
16	813.3
18	853.4
20	892.8

NOTE: ALL MEASUREMENTS BASED ON MM (MILLIMETER)

Mechanical Tilt Setting Chart For QPA65R-W4BA





Mounting Bracket Kit

MBK-20

Mechanical

Weight	40.6 lbs (18.4 kg)
Hinge Pitch	27.6 in (700 mm)
Mounting Pole Dimension	3.5 to 4.5 in (89.1 to 115 mm)
Fastener Size	M10 HHC Screw, DIN 933, ISO 4017 M12 Hex Nut, DIN 934, ISO 4032
Installation Torque	M10-18 ft·lbs (25 N·m), M12-40 ft·lbs (54 N·m)
Maximum Static Load per Sector	170.9 lbs (77.5 kg)
Mechanical Tilt	0° to 20°

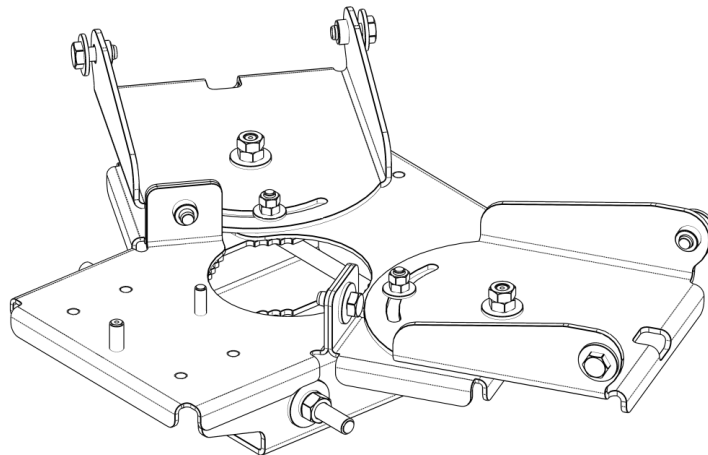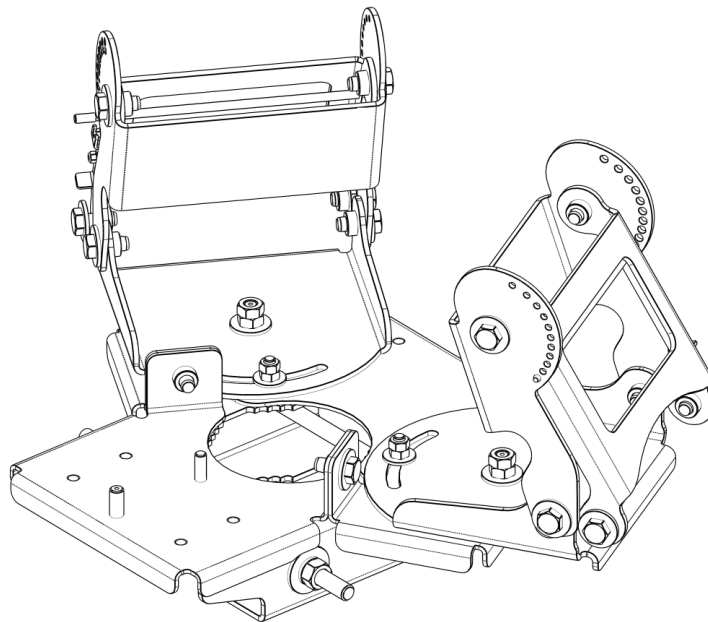


MBK-20



Mechanical

QPA65R-W4B ANTENNA DISTANCE FROM POLE BASED ON THE MECHANICAL TILT SETTING

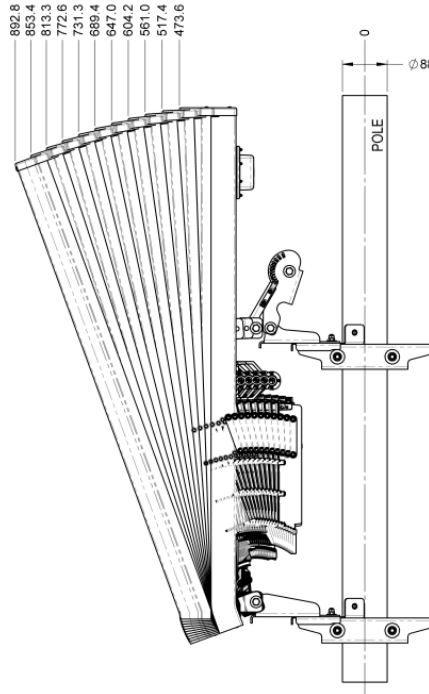

MECHANICAL TILT (°)	DISTANCE FROM POLE \varnothing
0	473.6
2	517.4
4	561.0
6	604.2
8	647.0
10	689.4
12	731.3
14	772.6
16	813.3
18	853.4
20	892.8

NOTE: ALL MEASUREMENTS BASED ON MM (MILLIMETER)

Mechanical Tilt Setting Chart For QPA65R-W4BA




Mounting Bracket Kit

MBK-21

Mechanical

Weight	45.6 lbs (20.7 kg)
Hinge Pitch	27.6 in (700 mm)
Mounting Pole Dimension	3.5 to 4.5 in (89.1 to 115 mm)
Fastener Size	M10 HHC Screw, DIN 933, ISO 4017 M12 Hex Nut, DIN 934, ISO 4032
Installation Torque	M10-18 ft·lbs (25 N·m), M12-40 ft·lbs (54 N·m)
Maximum Static Load per Sector	170.9 lbs (77.5 kg)
Mechanical Tilt	0° to 20°

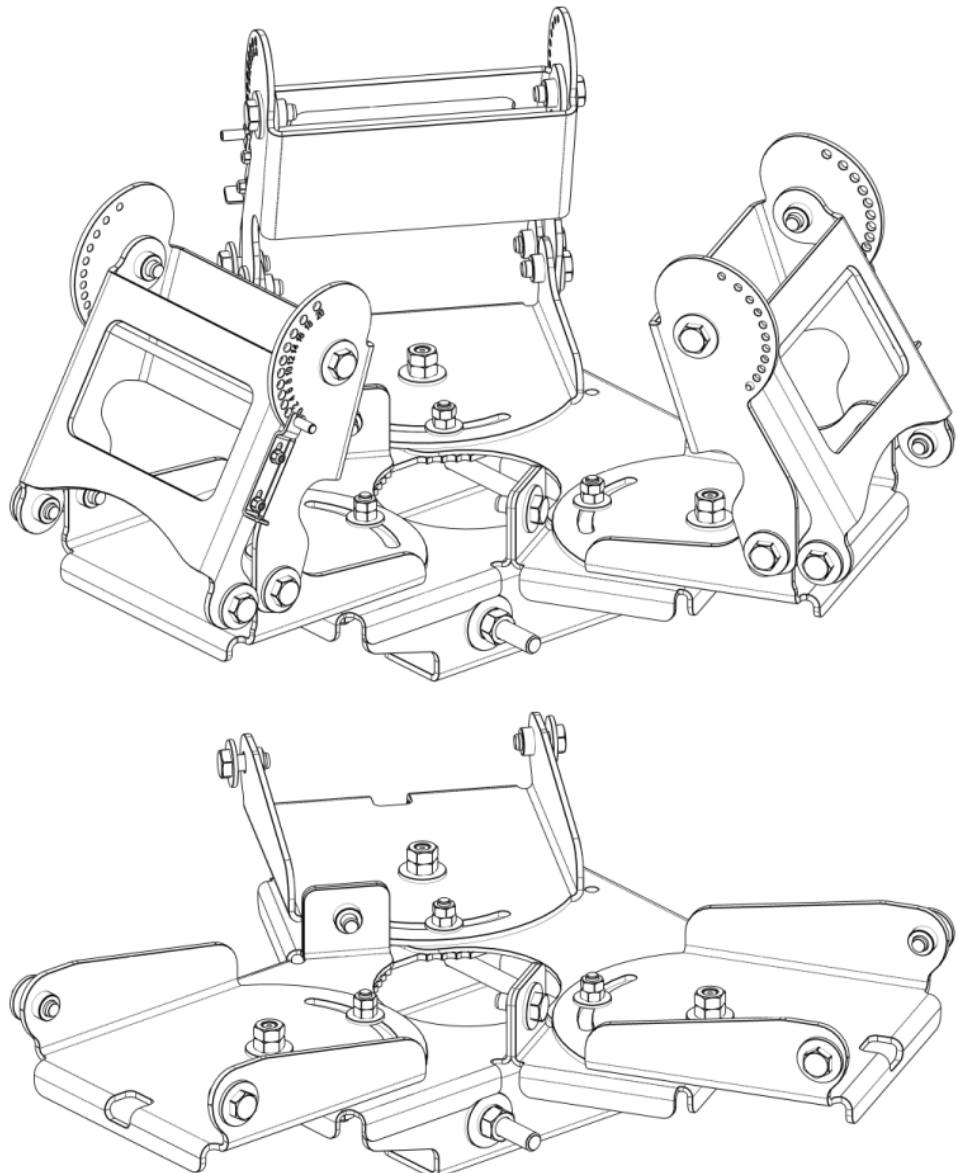


MBK-21



Mechanical

QPA65R-W4B ANTENNA DISTANCE FROM POLE BASED ON THE MECHANICAL TILT SETTING

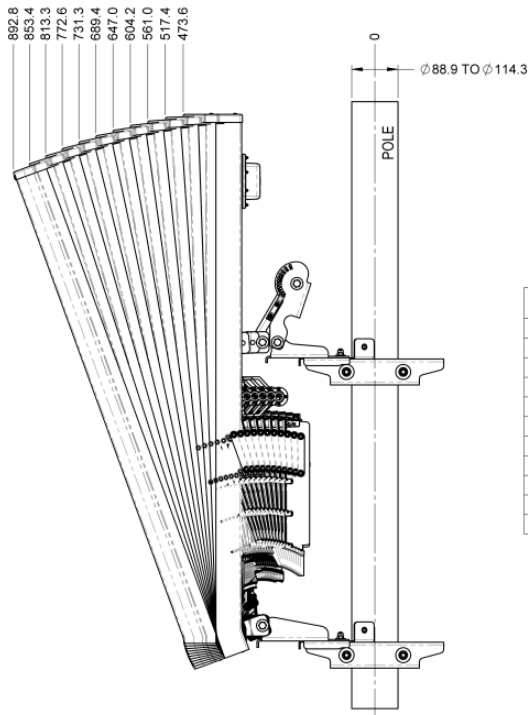

MECHANICAL TILT (°)	DISTANCE FROM POLE \varnothing
0	473.6
2	517.4
4	561.0
6	604.2
8	647.0
10	689.4
12	731.3
14	772.6
16	813.3
18	853.4
20	892.8

NOTE: ALL MEASUREMENTS BASED ON MM (MILLIMETER)

Mechanical Tilt Setting Chart For QPA65R-W4BA



Electrical

Parameter	Ports	Frequency	Value*
Return Loss	INPUT FROM RADIO / OUTPUT TO FILTER	1710-1880 MHz	> 25 dB
	SMA MONITOR PORT	1805-1880 MHz	> 16 dB
Insertion Loss	INPUT FROM RADIO / OUTPUT TO FILTER	1710-1880 MHz	< 0.3 dB
Coupling	INPUT FROM RADIO / SMA MONITOR PORT	1805-1880 MHz	39.0-41.0 dB
Isolation	OUTPUT TO FILTER / SMA MONITOR PORT	1805-1880 MHz	> 55 dB


*Requirements above must use a 50 Ohm load that has a Return Loss >35 dB from 1805 – 1880 MHz.

Parameter	Input Frequency	Input Power	Measured Port	Measured Frequency	Requirement
IMD 1800 MHz 3 rd Order	1880 MHz	43 dBm	SMA MONITOR PORT	1730-1785 MHz	< -120 dBm
	1805-1832.5 MHz	43 dBm			

*Perform test as described in 740-0003-01 IMD Test Procedure for Inline Passive Device Setup For Couplers & Power Dividers.

Mechanical

Model Number	RM-02
Fits Radio	Nokia AHEB Radio
For Antenna Models	QPA65R-W3B and QPA65R-W4B
Overall Weight	3.5 lbs. (1.6 kg) not including radio

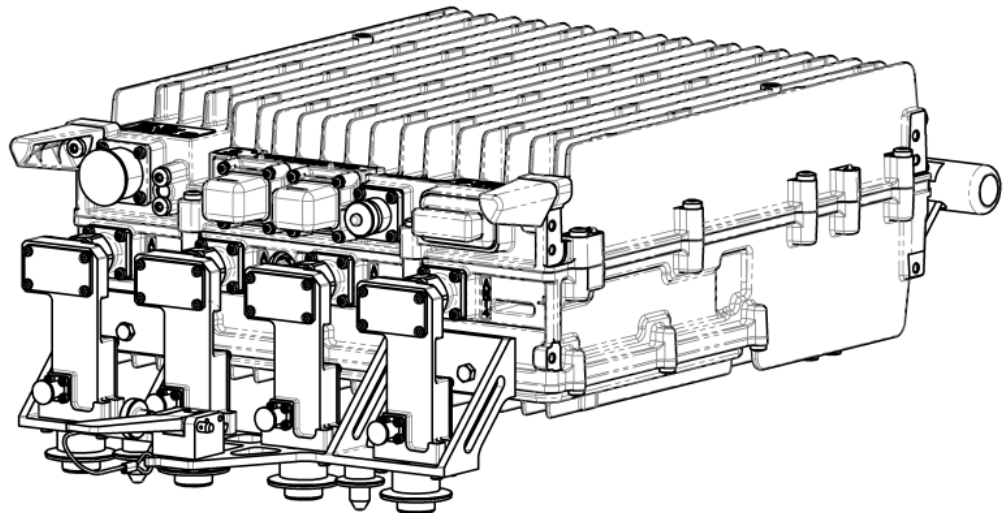

Radio installed to Manifold and Mount

Environmental Specifications

Model Number	RM-02
Temperature Range	-45° to 70° C



Internal Remote Electrical Tilt (iRET)

BSA-RET400

General Specifications

Part Number	BSA-RET400
Protocols	AISG 2.0
RET Type	Type 17
Adjustment Cycles	>10,000 cycles
Tilt Accuracy	±0.1°
Temperature Range	-40° C to 70° C


Electrical

Data Interface Signal	DC
Input Voltage	10-30 Vdc
Current Consumption Tilt	100 mA at $V_{in}=24$ (500 mA MAX)
Current Consumption Idle	10 mA at $V_{in}=24$

Mechanical

Dimensions (LxWxD)	7.0x5.3x1.8 in. (179x134x45 mm)
Housing	ASA/ABS/Aluminum
Weight	1.3 lbs (0.6 kg)

ASA= Acrylic Styrene Acrylonitrile
ABS=Acrylonitrile Butadiene Styrene

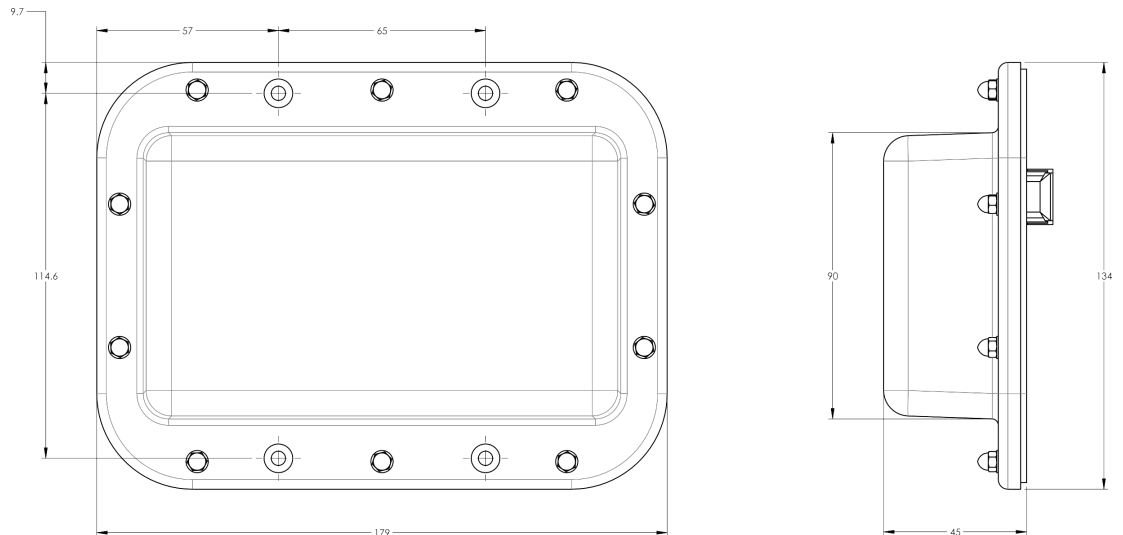



STANDARDS & CERTIFICATIONS

Quad Port High-Band Antenna

QPA65R-W3B

Standards & Compliance

Safety	EN 60950-1, UL 60950-1
Emission	EN 55022
Immunity	EN 55024
Environmental	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, GR-63-CORE 4.3.1, EN 60529

Certifications

Antenna Interface Standards Group (AISG), Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001

