

- Four foot (1.2 m) internally multiplexed MultiBand antenna, including twelve external RF ports (16 RF ports internal), with a 65° azimuth beamwidth covering 698-896 MHz and 1695-2400 MHz frequencies
- Eight wide high band ports covering 1695-2400 MHz and four wide low band ports covering 698-896 MHz in a single antenna enclosure
- Innovative Multiplexed/RET Control configuration, supporting Dual Band Radio Configurations (B12/B5 and B29/B5). The antenna provides Dual 4T4R (4x4 MIMO) capability, while providing independent RET control, an Industry First
- Innovative Low and High Band Array configuration allows for 4T4R (4x4 MIMO) on Low Band and 4T4R (4x4 MIMO) High Band on two Arrays, using full length arrays (non stacked), all in a 20.7" (525 mm) width enclosure, an Industry First
- Industry leading antenna topology and RET shielding techniques drastically mitigate PIM propagation from B12/B14/B29 operations, allowing for superior Network performance
- Full Spectrum Compliance for PCS, AWS-3 and WCS frequencies and 700/850 MHz Dual Band Radio Configurations
- LTE Optimized FBR and SPR performance, providing for an efficient use of valuable radio capacity
- LTE Optimized Boresight and Sector XPD and USL performance, essential for LTE Performance
- Exceeds minimum PIM performance requirements
- Internally Integrated RET Controllers (Type 17)
- Equipped with new 4.3-10 connector, which is 40% smaller than traditional 7/16 DIN connector

Overview

The CCI internally multiplexed MultiBand array is a twelve port (16 RF ports internal) antenna, with eight wide band ports covering 1695-2400 MHz and four low band ports covering 698-896 MHz. The antenna provides the capability to deploy Dual 4T4R (4x4 MIMO) in the high band, with separate RET control. The antenna also provides the capability to provide independent RET control for 700/850 MHz Dual Band Radio Configurations, while maintaining 4T4R (4x4 MIMO) across the low band ports.

CCI antennas are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

Applications

- Dual 4x4 MIMO for the High Band and 4X4 MIMO Low Band ports
- Ready for Network Standardization on 4.3-10 DIN connectors
- With CCI's multiband antennas, wireless providers can connect multiple platforms to a single antenna, reducing tower load, lease expense, deployment time and installation costs



SPECIFICATIONS

Diplexed Multi-Band Antenna

DMP65R-BU4E

Electrical

Ports	4 x Low Band Ports for 698-896 MHz	
Frequency Range	698-798 MHz	824-896 MHz
Gain ¹	12.9 dBi	13.3 dBi
Gain (Average) ²	12.0 dBi	12.5 dBi
Azimuth Beamwidth (-3dB)	74°	63°
Elevation Beamwidth (-3dB)	20.1°	17.7°
Electrical Downtilt	2° to 16°	2° to 16°
Elevation Sidelobes (1st Upper)	<-17 dB	<-16 dB
Front-to-Back Ratio @180°	> 32 dB	> 32 dB
Front-to-Back Ratio ±20°	> 30 dB	> 30 dB
Cross-Polar Discrimination at Peak	> 25 dB	> 25 dB
Cross-Polar Discrimination at Sector ³	11.5 dB	8.3 dB
Cross-Polar Port-to-Port Isolation	> 25 dB	> 25 dB
Voltage Standing Wave Ratio (VSWR)	< 1.5:1	< 1.5:1
Passive Intermodulation (2x20W)	≤ -153 dBc	≤ -153 dBc
Input Power Continuous Wave (CW)	500 watts	500 watts
Polarization	Dual Linear 45°	Dual Linear 45°
Input Impedance	50 ohms	50 ohms
Lightning Protection	DC Ground	DC Ground

¹Peak gain across sub-bands.

²Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.

³Defined as statistical one sided variable, following document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.

Ports	8 x High Band Ports for 1695-2400 MHz			
Frequency Range	1695-1880 MHz	1850-1990 MHz	1920-2180 MHz	2300-2400 MHz
Gain ¹	16.4 dBi	16.6 dBi	16.7 dBi	17.3 dBi
Gain (Average) ²	15.5 dBi	16.0 dBi	16.2 dBi	16.7 dBi
Azimuth Beamwidth (-3dB)	69°	70°	71°	55°
Elevation Beamwidth (-3dB)	8.3°	7.3°	6.8°	6.0°
Electrical Downtilt	2° to 10°	2° to 10°	2° to 10°	2° to 10°
Elevation Sidelobes (1st Upper)	<-16 dB	<-15 dB	<-15 dB	<-15 dB
Front-to-Back Ratio @180°	> 35 dB	> 35 dB	> 35 dB	> 35 dB
Front-to-Back Ratio ±20°	> 31 dB	> 31 dB	> 32 dB	> 32 dB
Cross-Polar Discrimination at Peak	> 18 dB	> 17 dB	> 18 dB	> 19 dB
Cross-Polar Discrimination at Sector ³	6.5 dB	4.4 dB	4.4 dB	7.5 dB
Cross-Polar Port-to-Port Isolation	> 25 dB	> 25 dB	> 25 dB	> 25 dB
Voltage Standing Wave Ratio (VSWR)	< 1.5:1	< 1.5:1	< 1.5:1	< 1.5:1
Passive Intermodulation (2x20W)	≤ -153 dBc	≤ -153 dBc	≤ -153 dBc	≤ -153 dBc
Input Power Continuous Wave (CW)	300 watts	300 watts	300 watts	300 watts
Polarization	Dual Linear 45°	Dual Linear 45°	Dual Linear 45°	Dual Linear 45°
Input Impedance	50 ohms	50 ohms	50 ohms	50 ohms
Lightning Protection	DC Ground	DC Ground	DC Ground	DC Ground

¹Peak gain across sub-bands.

²Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.

³Defined as statistical one sided variable, following document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.



SPECIFICATIONS

Diplexed Multi-Band Antenna


DMP65R-BU4E

Mechanical

Dimensions (LxWxD)	48.0x20.7x9.7 in (1220x525x247 mm)
Survival Wind Speed	> 150 mph (> 241 kph)
Front Wind Load	212 lbs (943 N) @ 100 mph (161 kph)
Side Wind Load	109 lbs (483 N) @ 100 mph (161 kph)
Equivalent Flat Plate Area	8.3 ft ² (0.8 m ²)
Weight *	91.7 lbs (41.6 kg)
Packaging Dimensions (LxWxD)	59.8x25.4x17.0 in (1518x644x431 mm)
Packaged Weight ~	133.6 lbs (60.6 kg)
Connector	12 x 4.3-10 female
Mounting Pole	2 to 5 in (5 to 12 cm)

* Weight excludes mounting

Bottom View

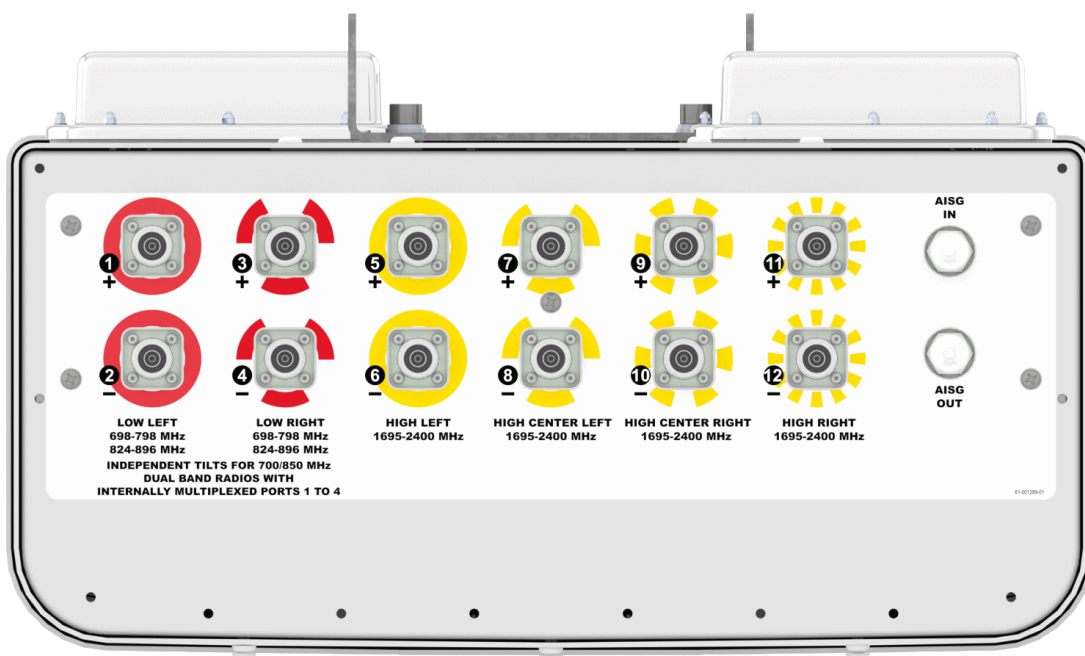




SPECIFICATIONS

Diplexed Multi-Band Antenna

DMP65R-BU4E

Mechanical

Connector Spacing

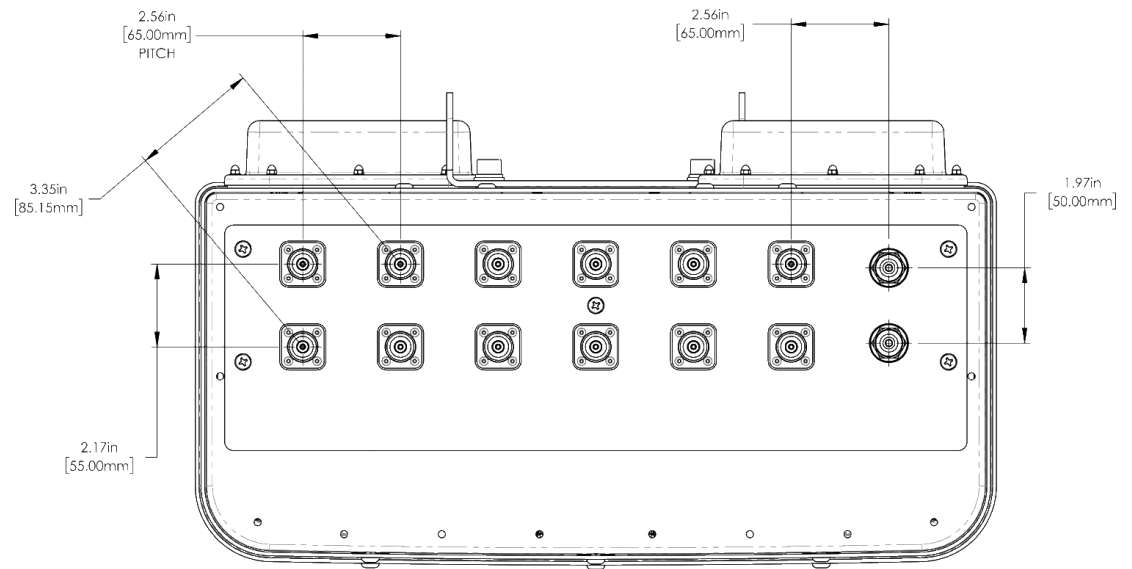



SPECIFICATIONS

Diplexed Multi-Band Antenna

DMP65R-BU4E

Mechanical


RET to Element Configuration

DMP65R-BU4EA Element and RET configuration (Type 17 Internal RET)

RET placement as viewed from rear of antenna

Top of antenna

Top of antenna Viewed from rear

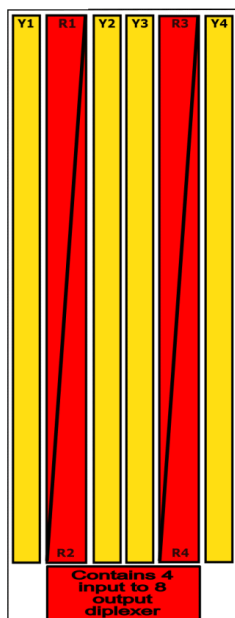

MM.1

698-798 MHz (700 RET)
Ports 1, 2, 3 & 4
(R1 & R3)

MM.3

1695-2400 MHz
Ports 5, 6, 7 & 8
(Y1 & Y2)

MM.4

1695-2400 MHz
Ports 9, 10, 11 & 12
(Y3 & Y4)

MM.2

824-896 MHz (850 RET)
Ports 1, 2, 3 & 4
(R2 & R4)

Array	Ports	Freq (MHz)	Ports controlled by dedicated RET	AISG RET UID
R1	1, 2	698-798	1, 2, 3, 4	ClxxxxxxMM.1
R3	3, 4			
R2	1, 2	824-896	1, 2, 3, 4	ClxxxxxxMM.2
R4	3, 4			
Y1	5, 6	1695-2400	5, 6, 7, 8	ClxxxxxxMM.3
Y2	7, 8			
Y3	9, 10	1695-2400	9, 10, 11, 12	ClxxxxxxMM.4
Y4	11, 12			




SPECIFICATIONS

Diplexed Multi-Band Antenna


DMP65R-BU4E

Typical Antenna Patterns


For detailed information on additional antenna patterns, contact customer support at support@cciprducts.com

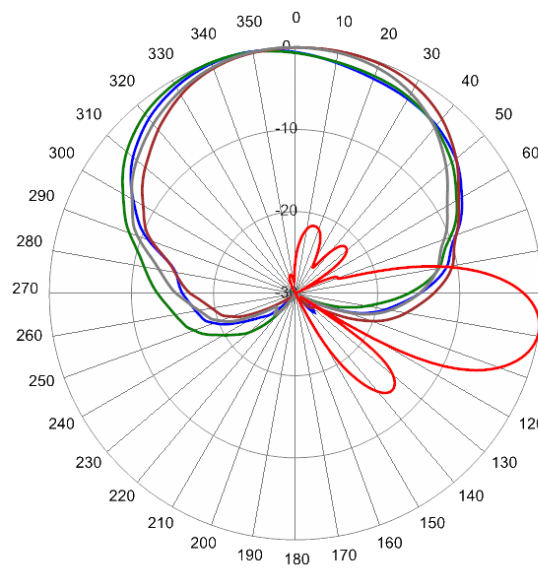


722 MHz Azimuth with Elevation 9°

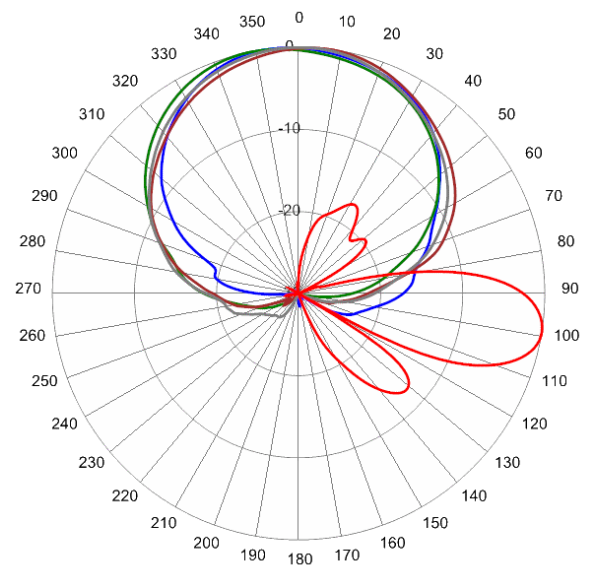

840 MHz Azimuth with Elevation 9°

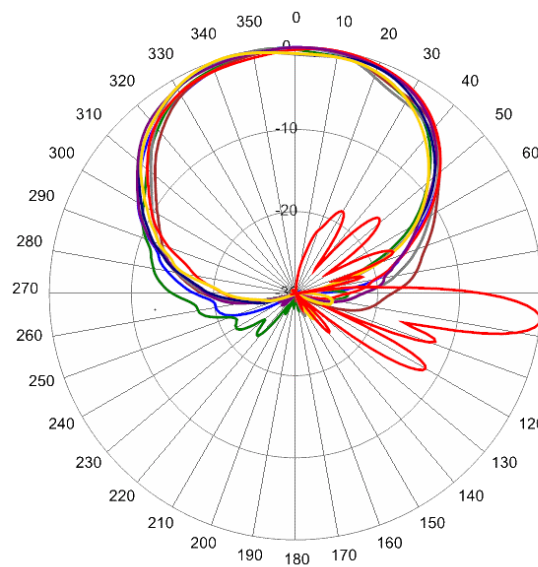

1780 MHz Azimuth with Elevation 6°

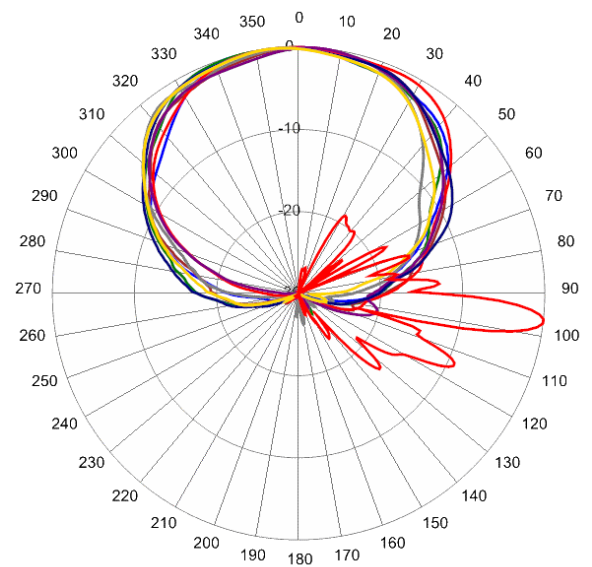

2155 MHz Azimuth with Elevation 6°



ORDERING

Diplexed Multi-Band Antenna

DMP65R-BU4E

Parts & Accessories

DMP65R-BU4EA-K	Four foot (1.2 m) antenna with 65° azimuth beamwidth, 4.3-10 female connectors, 4 factory installed BSA-RET400 RET actuators (Type 17 internal) and MBK-15 mounting bracket
MBK-15	Mounting bracket kit (top and bottom) with fixed 0° mechanical tilt
MBK-02	Mounting bracket kit (top and bottom) with 0° to 10° mechanical tilt
DM-01	Dual mount mast bracket for side by side antenna mounting
BSA-RET400	Type 17 Internal Remote Electrical Tilt System (RET)
AISGC-M-F-10FT	10 Ft (3 m) Male/Female RRU to Antenna AISG cable




ACCESSORIES

Mounting Bracket Kit

MBK-15

Mechanical

Weight	8.6 lbs (3.9 kg)
Hinge Pitch	31.5 in (800 mm)
Mounting Pole Dimension	2 to 5 in (5 to 12 cm)
Fastener Size	M10
Installation Torque	15 ft-lbs (20 N·m)
Mechanical Tilt	0°

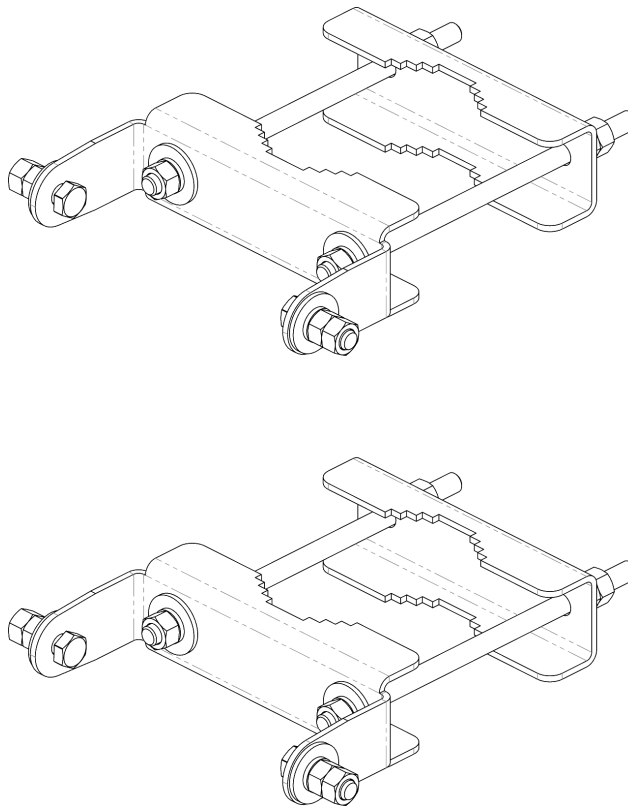

MBK-15 Top and Bottom Bracket




ACCESSORIES

Mounting Bracket Kit


MBK-02

Mechanical


Weight	9.8 lbs (4.4 kg)
Hinge Pitch	31.5 in (800 mm)
Mounting Pole Dimension	2 to 5 in (5 to 12 cm)
Fastener Size	M10
Installation Torque	15 ft-lbs (20 N·m)
Mechanical Tilt Adjustment	0° - 10°

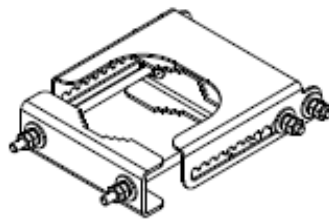

MBK-02 Top Adjustable Bracket

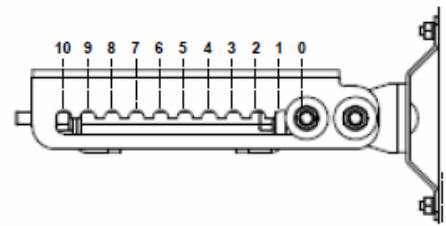

MBK-02 Top Adjustable Bracket Side View

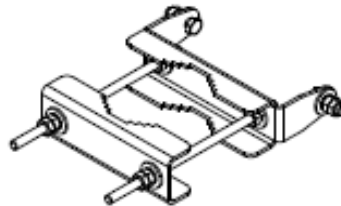

MBK-02 Bottom Fixed Bracket




ACCESSORIES

Dual Mount Mast Bracket


DM-01

Mechanical



Weight	70.5 lbs (32.0 kg)
Hinge Pitch (Vertical)	31.5 in (800 mm)
Antenna Spacing (Horizontal)	15.6 in (396 mm) or 23.4 in (594 mm)
Fastener Size	M10 & M12
Installation Torque	15 ft-lb (20 N-m) for M10, 40 ft-lb (54 N-m) for M12
Mechanical Tilt Adjustment	0° - 10°

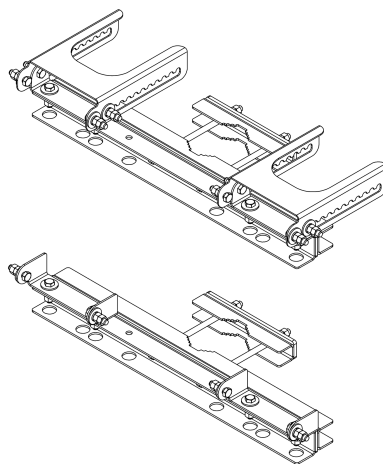

DM-01 Bracket

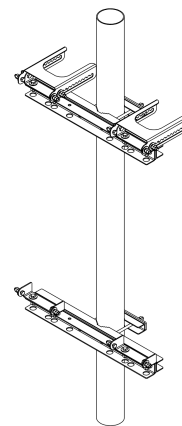

DM-01 Mounting Brackets (on Pole)

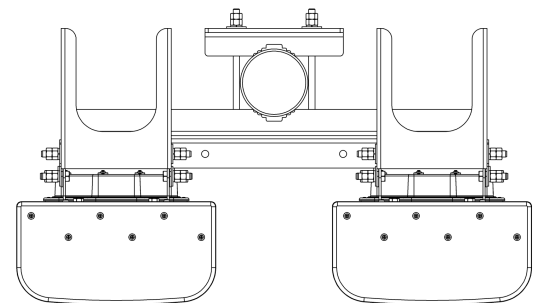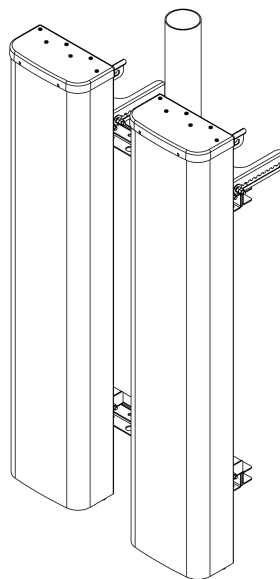

Two - 65° Antennas Mounted on Pole using DM-01 Brackets (Iso and Top Views)



ACCESSORIES

Internal Remote Electrical Tilt (iRET)

BSA-RET400

General Specifications

Part Number	BSA-RET400
Protocols	AISG 2.0
RET Type	Type 17
Adjustment Cycles	>10,000 cycles
Tilt Accuracy	$\pm 0.1^\circ$
Temperature Range	-40° C to 70° C


Electrical

Data Interface Signal	DC
Input Voltage	10-30 Vdc
Current Consumption Tilt	100 mA at $V_{in}=24$ (500 mA MAX)
Current Consumption Idle	10 mA at $V_{in}=24$

Mechanical

Dimensions (LxWxD)	7.0x5.3x1.8 in. (179x134x45 mm)
Housing	ASA/ABS/Aluminum
Weight	1.3 lbs (0.6 kg)

ASA= Acrylic Styrene Acrylonitrile
ABS=Acrylonitrile Butadiene Styrene

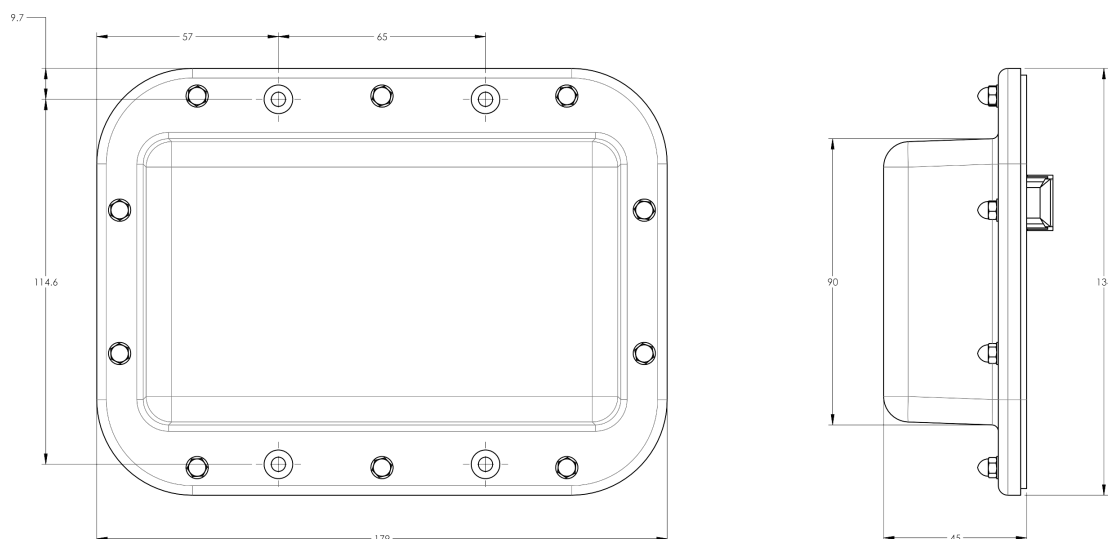



ACCESSORIES

AISG Cable


AISGC-M-F-xFT

Electrical Specifications

Individual Cable Part Number	AISGC-M-F-x(FT)
Cable style	UL2464
Protocol	AISG 1.1 and AISG 2.0
Maximum voltage	300 V
Rated current	5 A at 104° F (40° C)

Mechanical Specifications

Individual Cable Part Number	AISGC-M-F-x(FT)
Cables per kit	1
Connectors	2 x 8 pin IEC 60130-9 Straight male/straight female
Tightening torque	Hand tighten only ≈ 1.84 ft-lbs (2.5 Nm)
Construction	Shielded (Tinned Copper Braid)
Braid coverage	85%
Jacket Material	Matte Polyurethane (Black)
Conductors	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464
Cable Diameter	0.307 in (7.8 mm)
Length	See order details
Minimum bend radius	3.15 in (80 mm)

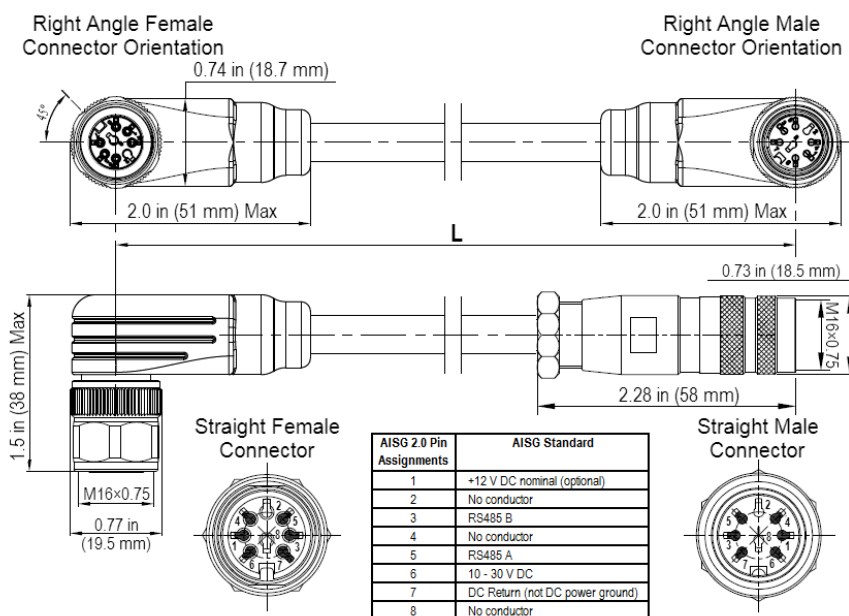

AISG-Male to AISG-Female Jumper Cable



ACCESSORIES

AISG Cable

AISGC-M-F-xFT

Environmental Specifications

Individual Cable Part Number	AISGC-M-F-xFT
Temperature Range	-40° to 80° C
Flammability	UL 1581 VW-1
Ingress Protection	IEC 60529:2001, IP67



STANDARDS & CERTIFICATIONS

Diplexed Multi-Band Antenna

DMP65R-BU4E

Standards & Compliance

Safety	EN 60950-1, UL 60950-1
Emission	EN 55022
Immunity	EN 55024
Environmental	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, GR-63-CORE 4.3.1, EN 60529, IP 24

Certifications

Antenna Interface Standards Group (AISG), Federal Communication
Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001

