

- Six foot (1.8 m) internally multiplexed MultiBand, fourteen port antenna, with a 45° azimuth beamwidth covering 698-896 MHz and 1695-2400 MHz frequencies
- Eight wide mid band ports covering 1695-2400 MHz, two wide low band ports covering 698-896 MHz and four frequency specific low band ports covering 717-728 MHz and 758-798 MHz (over distributed diplexing) in a single antenna enclosure
- Innovative Low and Mid Band Array configuration allows for independent 2T2R (2x2 MIMO) on B29 Low Band Array and 4T4R (4x4 MIMO) on B14/B12 Low Band Arrays and Dual 4T4R (4x4 MIMO) Mid Band Array, using full length arrays, all in a 23.8" (606 mm) width enclosure
- Industry leading antenna topology and RET shielding techniques drastically mitigate PIM propagation from B12/B14/B29 operations, allowing for superior Network performance
- Full Spectrum Compliance for 698-896 MHz / 1695-2400 MHz operations
- LTE Optimized FBR and SPR performance, providing for an efficient use of valuable radio capacity
- LTE Optimized Boresight and Sector XPD and USL performance, essential for LTE Performance
- Exceeds minimum PIM performance requirements
- Equipped with four RET-T17iG3-M, internal integrated AISG 2.0 compliant (upgradable to AISG 3.0 when available) Remote Electrical Tilt (RET) Actuators
- Equipped with new 4.3-10 connector

Overview

The CCI internally multiplexed MultiBand array is a fourteen port antenna, with eight wide mid band ports covering 1695-2400 MHz, two wide low band ports covering 698-896 MHz and four frequency specific low band ports covering 717-728 MHz and 758-798 MHz (over distributed diplexing).

The antenna provides the capability to deploy dual 4T4R (4x4 MIMO) in the Mid Band, with a separate RET control. The antenna also provides the capability to provide independent RET control for B29 and B14/B12 operations.

CCI antennas are designed and produced to ISO 9001:2008 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

Applications

- Dual 4x4 MIMO for the Mid band ports and 2x2 MIMO on B29 ports and 4x4 MIMO on B14/B12 ports
- Ready for Network Standardization on 4.3-10 connectors
- With CCI's multiband antennas, wireless providers can connect multiple platforms to a single antenna, reducing tower load, lease expense, deployment time and installation costs



SPECIFICATIONS

Multi-Band Fourteen-Port Antenna

FPA45R-BU6B

Electrical

| Ports | 2 x Low Band Ports for 717-728 MHz | 2 x Low Band Ports for 758-798 MHz | 2 x Low Band Ports for 698-896 MHz | |
|---|------------------------------------|------------------------------------|------------------------------------|-----------------|
| Frequency Range | 717-728 MHz | 758-798 MHz | 698-806 MHz | 824-896 MHz |
| Gain ¹ | 15.0 dBi | 15.4 dBi | 16.1 dBi | 16.6 dBi |
| Gain (Average) | 14.7 dBi | 14.9 dBi | 15.1 dBi | 15.9 dBi |
| Azimuth Beamwidth (-3dB) | 45° | 45° | 44° | 40° |
| Elevation Beamwidth (-3dB) | 11.4° | 10.9° | 11.3° | 10.1° |
| Electrical Downtilt | 2° to 12° | 2° to 12° | 2° to 12° | 2° to 12° |
| Elevation Sidelobes (1st Upper) | <-18 dB | <-19 dB | <-18 dB | <-17 dB |
| Front-to-Back Ratio @180° | > 30 dB | > 35 dB | > 30 dB | > 35 dB |
| Front-to-Back Ratio ±20° | > 28 dB | > 32 dB | > 28 dB | > 32 dB |
| Cross-Polar Discrimination at Peak | > 25 dB | > 28 dB | > 28 dB | > 28 dB |
| Cross-Polar Discrimination at 3 dB ² | 19.2 dB | 20.8 dB | 18.3 dB | 18.6 dB |
| Cross-Polar Port-to-Port Isolation | > 25 dB | > 25 dB | > 25 dB | > 25 dB |
| Voltage Standing Wave Ratio (VSWR) | < 1.5:1 | < 1.5:1 | < 1.5:1 | < 1.5:1 |
| Passive Intermodulation (2x20W) | ≤ -153 dBc | ≤ -153 dBc | ≤ -153 dBc | ≤ -153 dBc |
| Input Power Continuous Wave (CW) | 500 watts | 500 watts | 500 watts | 500 watts |
| Polarization | Dual Linear 45° | Dual Linear 45° | Dual Linear 45° | Dual Linear 45° |
| Input Impedance | 50 ohms | 50 ohms | 50 ohms | 50 ohms |
| Lightning Protection | DC Ground | DC Ground | DC Ground | DC Ground |

¹Peak gain across sub-bands.

²Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.

| Ports | 8 x Mid Band Ports for 1695-2400 MHz | | | |
|---|--------------------------------------|-----------------|-----------------|-----------------|
| Frequency Range | 1695-1880 MHz | 1850-1990 MHz | 1920-2180 MHz | 2300-2400 MHz |
| Gain ¹ | 18.4 dBi | 19.1 dBi | 19.8 dBi | 19.9 dBi |
| Gain (Average) | 17.2 dBi | 18.0 dBi | 18.5 dBi | 18.8 dBi |
| Azimuth Beamwidth (-3dB) | 50° | 47° | 45° | 43° |
| Elevation Beamwidth (-3dB) | 5.7° | 5.2° | 4.9° | 4.3° |
| Electrical Downtilt | 2° to 10° | 2° to 10° | 2° to 10° | 2° to 10° |
| Elevation Sidelobes (1st Upper) | <-18 dB | <-17 dB | <-17 dB | <-17 dB |
| Front-to-Back Ratio @180° | > 30 dB | > 35 dB | > 35 dB | > 35 dB |
| Front-to-Back Ratio ±20° | > 25 dB | > 30 dB | > 30 dB | > 30 dB |
| Cross-Polar Discrimination at Peak | > 19 dB | > 20 dB | > 24 dB | > 20 dB |
| Cross-Polar Discrimination at 3 dB ² | 8.8 dB | 12.5 dB | 12.2 dB | 15.3 dB |
| Cross-Polar Port-to-Port Isolation | > 25 dB | > 25 dB | > 25 dB | > 25 dB |
| Voltage Standing Wave Ratio (VSWR) | < 1.5:1 | < 1.5:1 | < 1.5:1 | < 1.5:1 |
| Passive Intermodulation (2x20W) | ≤ -153 dBc | ≤ -153 dBc | ≤ -153 dBc | ≤ -153 dBc |
| Input Power Continuous Wave (CW) | 300 watts | 300 watts | 300 watts | 300 watts |
| Polarization | Dual Linear 45° | Dual Linear 45° | Dual Linear 45° | Dual Linear 45° |
| Input Impedance | 50 ohms | 50 ohms | 50 ohms | 50 ohms |
| Lightning Protection | DC Ground | DC Ground | DC Ground | DC Ground |

¹Peak gain across sub-bands.

²Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.



SPECIFICATIONS

Multi-Band Fourteen-Port Antenna

FPA45R-BU6B


Mechanical

| | |
|---|--|
| Dimensions (LxWxD) | 72.0x23.8x10.0 in (1830x606x255 mm) |
| Survival Wind Speed | > 150 mph (> 241 kph) |
| Front Wind Load ¹ | 245 lbf @ 100 mph 1091 N @ 161 kph |
| Side Wind Load ¹ | 82 lbf @ 100 mph 365 N @ 161 kph |
| Effective Projective Area (EPA), Front ¹ | 11.1 ft ² (1.0 m ²) |
| Weight* | 119.0 lbs (54.0 kg) |
| Connector | 14 x 4.3-10 female |
| Mounting Pole | 2 to 5 in (5 to 12 cm) |

¹Windload values calculated using CFD analysis

* Weight excludes mounting kit

Bottom View

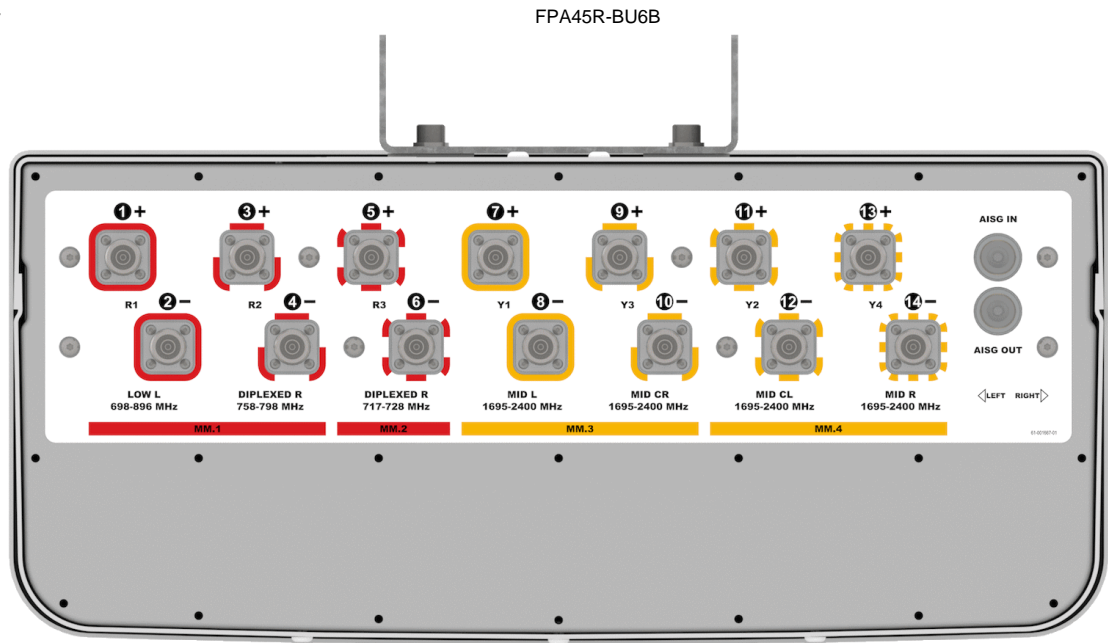




SPECIFICATIONS

Multi-Band Fourteen-Port Antenna

FPA45R-BU6B

Mechanical


Connector Spacing

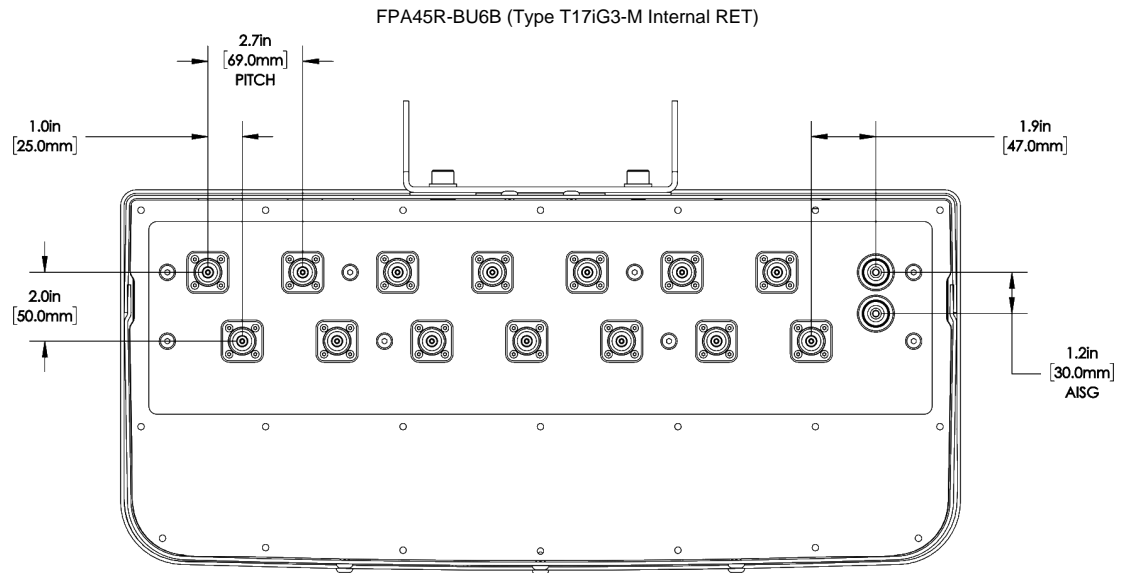

RET to Element Configuration

FPA45R-BU6BB Element and RET configuration (Type T17iG3-M Internal RET)

Top of antenna Viewed from rear

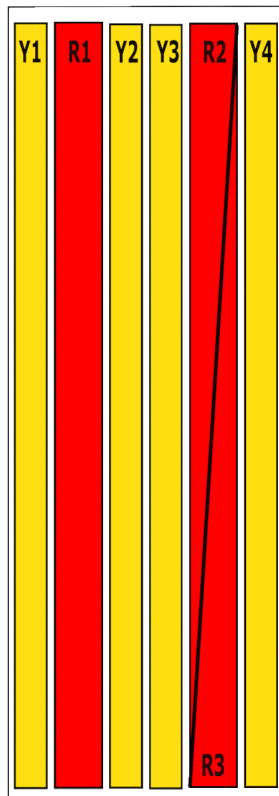


| Array | Ports | Freq (MHz) | Ports controlled by dedicated RET | AISG RET UID |
|-------|--------|------------|-----------------------------------|--------------|
| R1 | 1, 2 | 698-896 | 1, 2, 3, 4 | C1xxxxxxMM.1 |
| R2 | 3, 4 | 758-798 | | |
| R3 | 5, 6 | 717-728 | | C1xxxxxxMM.2 |
| Y1 | 7, 8 | 1695-2400 | 7, 8, 9, 10 | C1xxxxxxMM.3 |
| Y3 | 9, 10 | | | |
| Y2 | 11, 12 | 1695-2400 | 11, 12, 13, 14 | C1xxxxxxMM.4 |
| Y4 | 13, 14 | | | |




Typical Antenna Patterns


For detailed information on additional antenna patterns, contact customer support at support@cciproducts.com

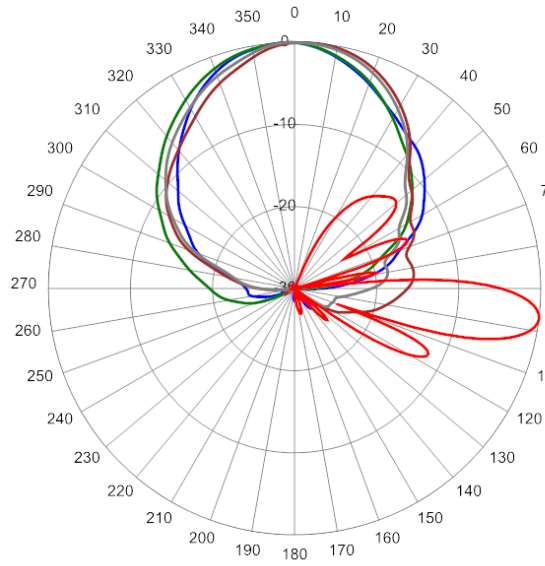

722 MHz Azimuth with Elevation 7° (Ports 1, 2, 5 & 6)

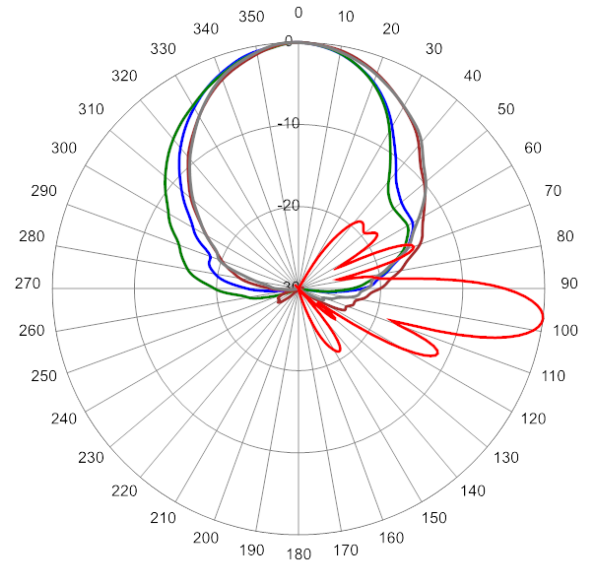

788 MHz Azimuth with Elevation 7° (Ports 1, 2, 3 & 4)

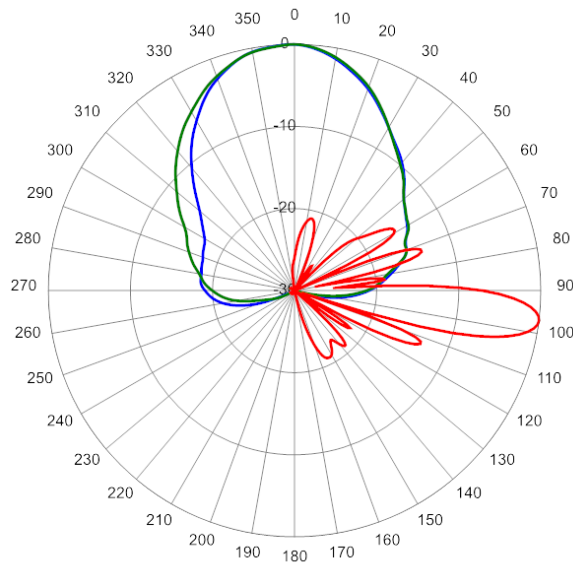


896 MHz Azimuth with Elevation 7° (Ports 1 & 2)




Multi-Band Fourteen-Port Antenna

FPA45R-BU6B


Typical Antenna Patterns

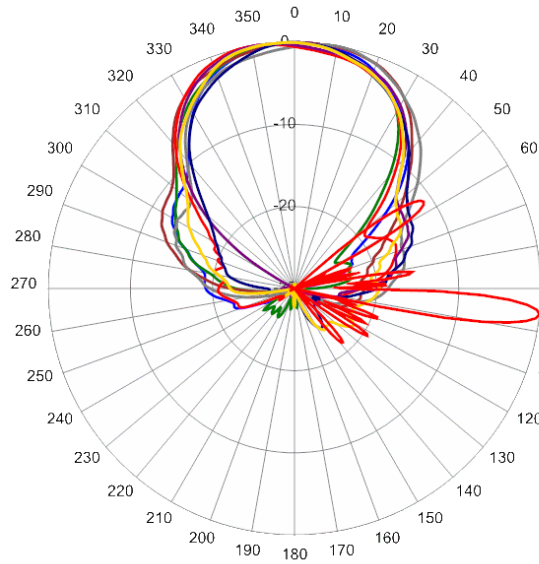

1850 MHz Azimuth with Elevation 6° (Ports 7 to 14)

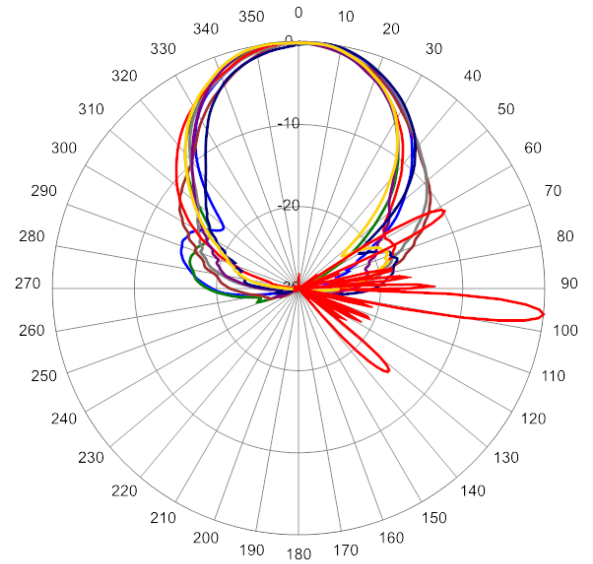

2155 MHz Azimuth with Elevation 6° (Ports 7 to 14)

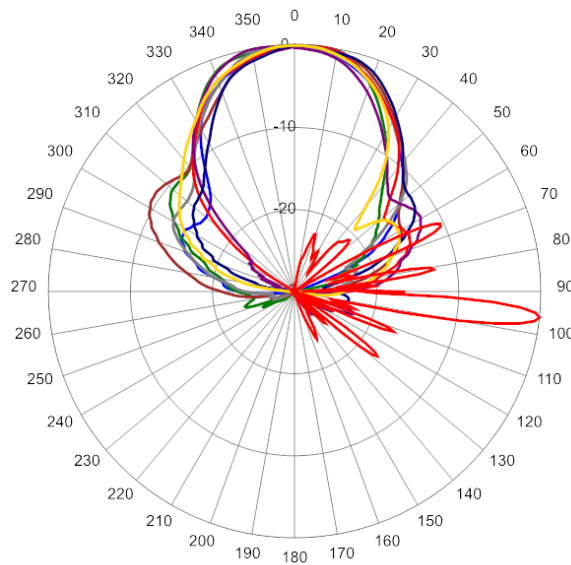

2360 MHz Azimuth with Elevation 6° (Ports 7 to 14)



ORDERING

Multi-Band Fourteen-Port Antenna

FPA45R-BU6B

Parts & Accessories

-
- | | |
|-----------------------|---|
| FPA45R-BU6BB-K | Six foot (1.8 m) antenna with 65° azimuth beamwidth, 4.3-10 female connectors, 4 factory RET-T17iG3-M actuators and MBK-16 mounting bracket |
| MBK-01 | Mounting bracket kit (top and bottom) with 0° to 10° mechanical tilt adjustment |
| MBK-16 | Mounting Kit with fixed 0° mechanical tilt |
| AISGC-M-F-10FT | 10 Ft (3 m) Male/Female RRU to Antenna AISG cable |
-




Mounting Bracket Kit


MBK-01

Mechanical


| | |
|-----------------------------------|------------------------|
| Weight | 12.6 lbs (5.7 kg) |
| Hinge Pitch | 47.25 in (1200 mm) |
| Mounting Pole Dimension | 2 to 5 in (5 to 12 cm) |
| Fastener Size | M12 |
| Installation Torque | 40 ft·lb (54 N·m) |
| Mechanical Tilt Adjustment | 0° - 10° |



MBK-01 Top Adjustable Bracket

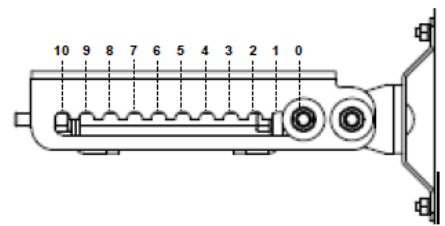

MBK-01 Top Adjustable Bracket Side View



MBK-01 Bottom Fixed Bracket





Mounting Bracket Kit

MBK-16

Mechanical

| | |
|--------------------------------|------------------------|
| Weight | 9.9 lbs (4.5 kg) |
| Hinge Pitch | 47.25 in (1200 mm) |
| Mounting Pole Dimension | 2 to 5 in (5 to 12 cm) |
| Fastener Size | M12 |
| Installation Torque | 40 ft·lbs (54 N·m) |
| Mechanical Tilt | 0° |

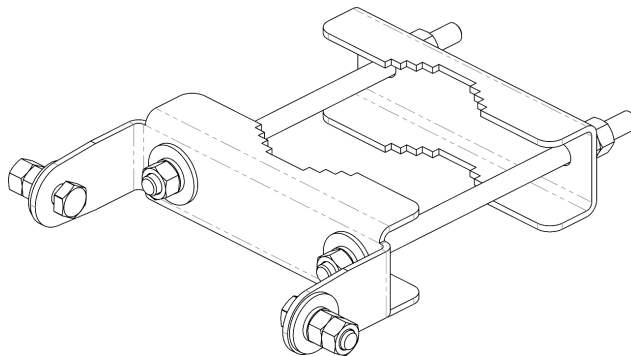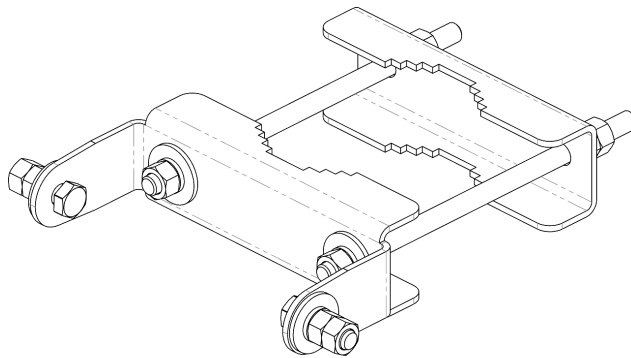

MBK-16 Top and Bottom Bracket



AISG Cable


AISGC-M-F-xFT

Electrical Specifications

| | |
|------------------------------|-----------------------|
| Individual Cable Part Number | AISGC-M-F-x(FT) |
| Cable style | UL2464 |
| Protocol | AISG 1.1 and AISG 2.0 |
| Maximum voltage | 300 V |
| Rated current | 5 A at 104° F (40° C) |

Mechanical Specifications

| | |
|------------------------------|--|
| Individual Cable Part Number | AISGC-M-F-x(FT) |
| Cables per kit | 1 |
| Connectors | 2 x 8 pin IEC 60130-9 Straight male/straight female |
| Tightening torque | Hand tighten only \approx 1.84 ft-lbs (2.5 Nm) |
| Construction | Shielded (Tinned Copper Braid) |
| Braid coverage | 85% |
| Jacket Material | Matte Polyurethane (Black) |
| Conductors | 1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464 |
| Cable Diameter | 0.307 in (7.8 mm) |
| Length | See order details |
| Minimum bend radius | 3.15 in (80 mm) |

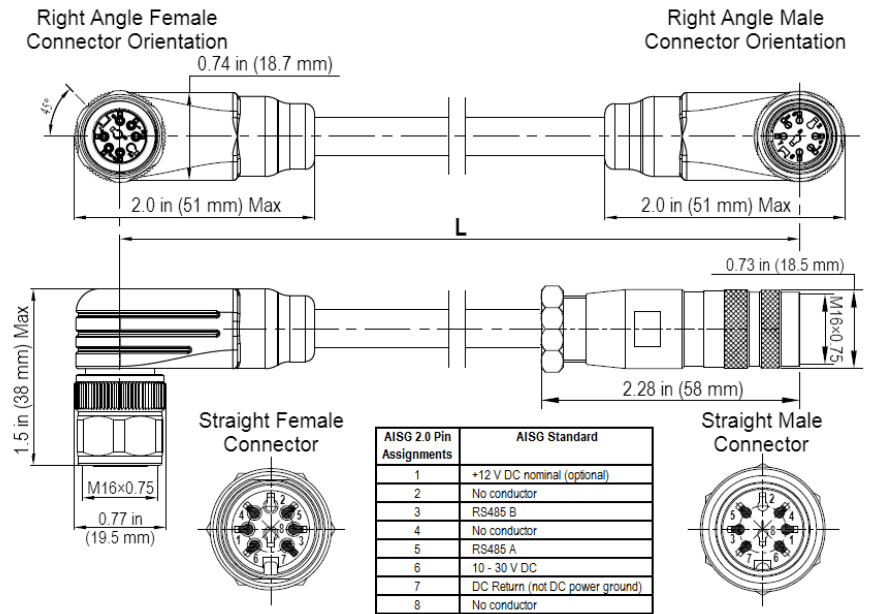

AISG-Male to AISG-Female Jumper Cable



Environmental Specifications

| | |
|------------------------------|----------------------|
| Individual Cable Part Number | AISGC-M-F-xFT |
| Temperature Range | -40° to 80° C |
| Flammability | UL 1581 VW-1 |
| Ingress Protection | IEC 60529:2001, IP67 |



STANDARDS & CERTIFICATIONS

Multi-Band Fourteen-Port Antenna

FPA45R-BU6B

Standards & Compliance

| | |
|----------------------|--|
| Safety | EN 60950-1, UL 60950-1 |
| Emission | EN 55022 |
| Immunity | EN 55024 |
| Environmental | IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, GR-63-CORE 4.3.1, EN 60529, IP 24 |

Certifications

Antenna Interface Standards Group (AISG), Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001

