



12HBSAR-KE6NAA (Type 17 RET Configuration Only)

**Top of antenna
Viewed from rear**

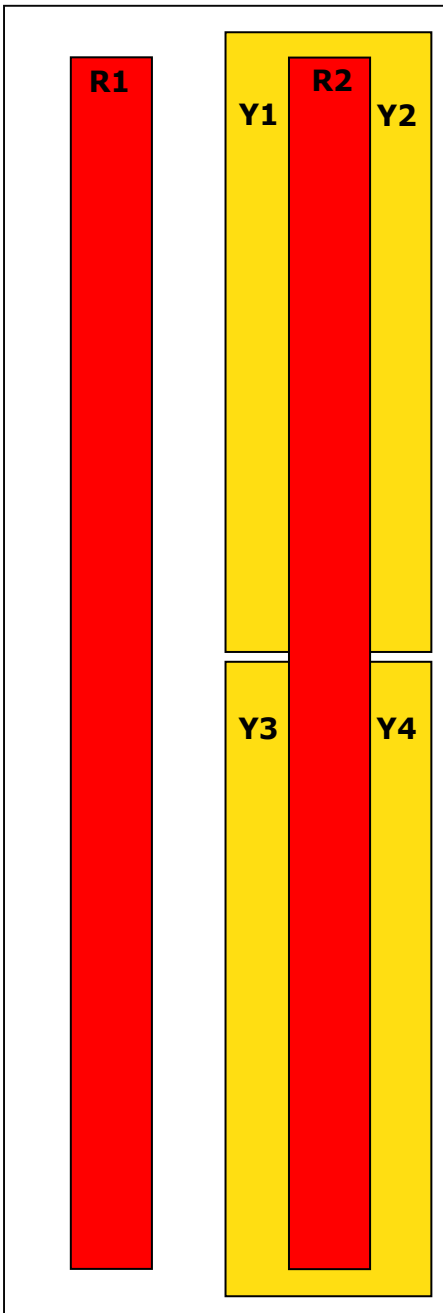

**RET placement
as viewed from rear
of antenna**

Top of antenna

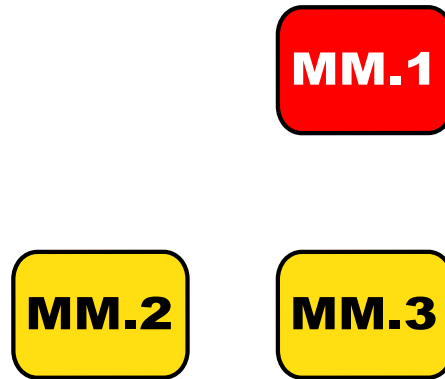

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-960	1, 2, 3, 4	C1xxxxxxxMM.1
R2	3, 4	698-960		
Y1	5, 6	1695-2690	5, 6, 7, 8 Left Beams	C1xxxxxxxMM.2
Y3	7, 8	1695-2690		
Y2	9, 10	1695-2690	9, 10, 11, 12 Right Beams	C1xxxxxxxMM.3
Y4	11, 12	1695-2690		

Array color boxes are not true depictions of size or position.