
## 16HBSAR-BWW7NAA (Type 17 RET Configuation Only)

## Top of antenna Viewed from rear

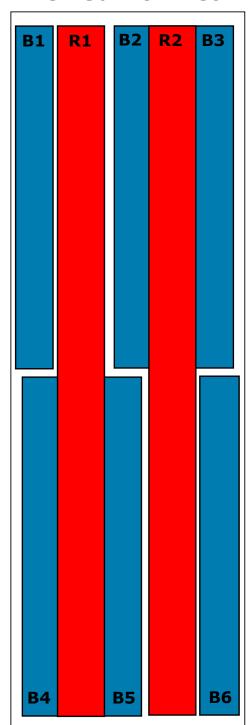

RET placement as view from rear of antenna

MM.2

**MM.3** 

MM.4



Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-896	1, 2, 3, 4	ClxxxxxxxMM.1
R2	3, 4	698-896		
B1	5, 6	1695-2180	5, 6, 7, 8	ClxxxxxxxMM.2
B6	7, 8	1695-2180	3, 0, 7, 8	CIXXXXXXXIVIIVI.2
B2	9, 10	1695-2180	9, 10, 11, 12	ClxxxxxxxMM.3
B4	11, 12	1695-2180	Left Beams	CIXXXXXXXIVIIVI.3
В3	13, 14	1695-2180	13, 14, 15, 16	Classes and ADA A
B5	15, 16	1695-2180	Right Beams	ClxxxxxxxMM.4

