

BFA4R-V5AA (Type 17 RET Configuration Only)

Element arrays as viewed from rear of antenna

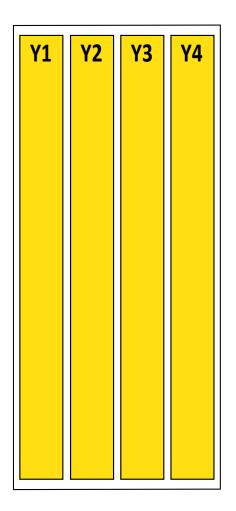

RET placement as viewed from rear of antenna

Top of antenna



MM.1

| Array | Ports | Freq (MHz) | Ports controlled by common RET | AISG RET UID |
|-----------|-------|------------|--------------------------------|--------------|
| Y1 | 1, 2 | 2300-2690 | 1, 2, 3, 4, 5, 6, 7, 8 | ClxxxxxxMM.1 |
| Y2 | 3, 4 | 2300-2690 | | |
| Y3 | 5, 6 | 2300-2690 | | |
| Y4 | 7, 8 | 2300-2690 | | |

