
## BSA33R-KE6BA (Type 17 RET Configuation Only)

## Top of antenna Viewed from rear

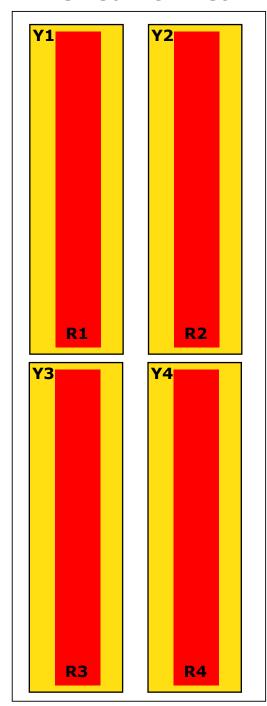

## RET placement as view from rear of antenna

Top of antenna

мм.3



**MM.2** 



Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-960	1, 2, 3, 4	
R3	3, 4	698-960	(Left Beams)	ClxxxxxxxMM.1
R2	5, 6	698-960	5, 6, 7, 8	
R4	7, 8	698-960	(Right Beams)	ClxxxxxxxMM.2
<b>Y1</b>	9, 10	1695-2690	9, 10, 11, 12	Clause NADA 2
Y2	11, 12	1695-2690	(Left Beams)	ClxxxxxxxMM.3
Y3	13, 14	1695-2690	13, 14, 15, 16	
Y4	<b>15, 16</b>	1695-2690	(Right Beams)	ClxxxxxxxMM.4

