


DMP45R-BU6EB

(Type 17 RET Configuration Only)

Top of antenna
Viewed from rear

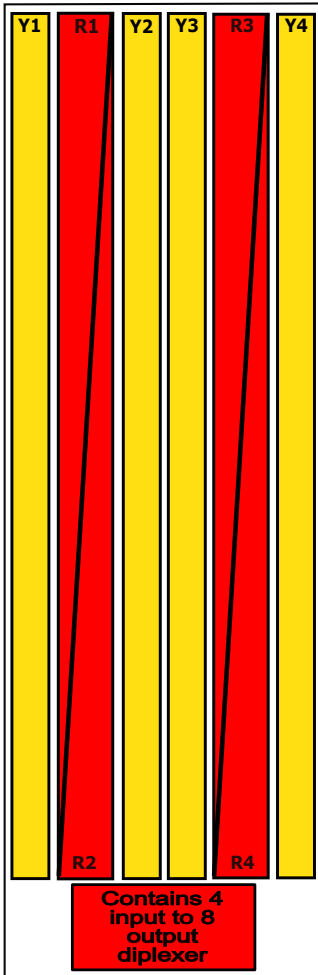

RET placement
as viewed from rear
of antenna

Top of antenna



698-798 MHz (700 RET)
Ports 1, 2, 3 & 4
(R1 & R3)



1695-2400 MHz
Ports 5, 6, 7 & 8
(Y1 & Y3)



1695-2400 MHz
Ports 9, 10, 11 & 12
(Y2 & Y4)



824-896 MHz (850 RET)
Ports 1, 2, 3 & 4
(R2 & R4)

Array	Ports	Freq (MHz)	Ports controlled by dedicated RET	AISG RET UID
R1	1, 2	698-798	1, 2, 3, 4	ClxxxxxxMM.1
R3	3, 4			
R2	1, 2	824-896	1, 2, 3, 4	ClxxxxxxMM.2
R4	3, 4			
Y1	5, 6	1695-2400	5, 6, 7, 8	ClxxxxxxMM.3
Y3	7, 8			
Y2	9, 10	1695-2400	9, 10, 11, 12	ClxxxxxxMM.4
Y4	11, 12			

Port Label

