


DMP65R-BU8DA

(Type 1 RET Configuration Only)

**Top of antenna
Viewed from rear**

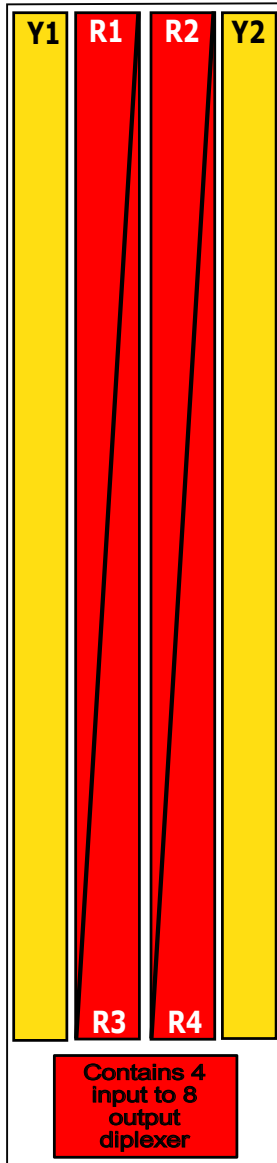


**RET placement
as viewed from rear
of antenna**

Top of antenna



MM.1

698-798 MHz (700 RET)
Ports 1, 2, 3 & 4
(R1 & R2)



MM.2

824-896 MHz (850 RET)
Ports 1, 2, 3 & 4
(R3 & R4)



MM.3

1695-2400 MHz
Ports 5, 6, 7 & 8
(Y1 & Y2)

Array	Ports	Freq (MHz)	Ports controlled by dedicated RET	RET location on Antenna	AISG RET UID
R1	1, 2	698-798	1, 2, 3, 4	Top (700 RET)	ClxxxxxxMM.1
R2	3, 4				
R3	1, 2	824-896	1, 2, 3, 4	Middle (850 RET)	ClxxxxxxMM.2
R4	3, 4				
Y1	5, 6	1695-2400	5, 6, 7, 8	Bottom	ClxxxxxxMM.3
Y2	7, 8				

Port Label

