OPA33R-BW6CA
(Type 17 RET Configuration Only)

CCI
EXTENDING WIRELESS PERFORMANCE

Top of antenna
Viewed from rear
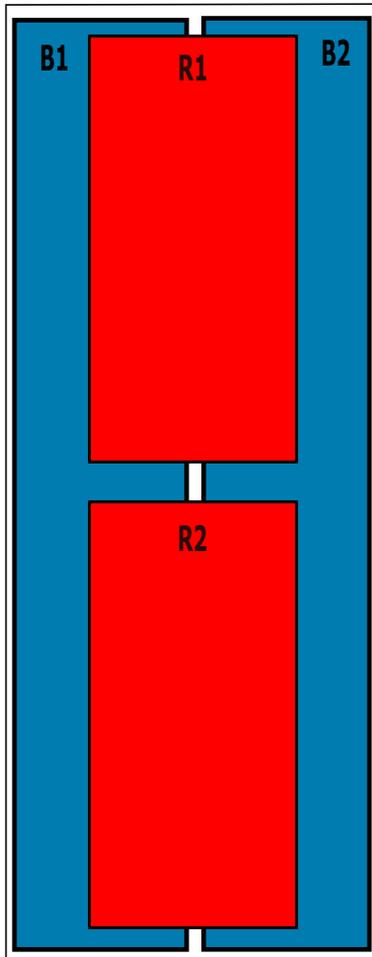
RET placement
as viewed from rear
of antenna

Top of antenna

MM.2

MM.1

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-896	1, 2, 3, 4	ClxxxxxxMM.1
R2	3, 4	698-896		
B1	5, 6	1695-2180	5, 6, 7, 8	ClxxxxxxMM.2
B2	7, 8	1695-2180		