
OPA65R-TE4CA (Type 17 RET Configuration Only)

Top of antenna Viewed from rear



RET placement as viewed from rear of antenna

Top of antenna

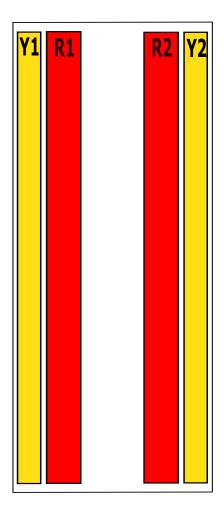

MM.2

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	614-896	1, 2, 3, 4	Clxxxxxxxxxxmm.1
R2	3, 4	614-896		
Y1	5, 6	1695-2690	5, 6, 7, 8	Clxxxxxxxxxxmm.2
Y2	7, 8	1695-2690		

