TPA65R-BU8GB
(Type 17 RET Configuration Only)

CCI
EXTENDING WIRELESS PERFORMANCE

**Top of antenna
Viewed from rear**

| Y1 | R1 | Y2 | Y3 | R2 | Y4 |
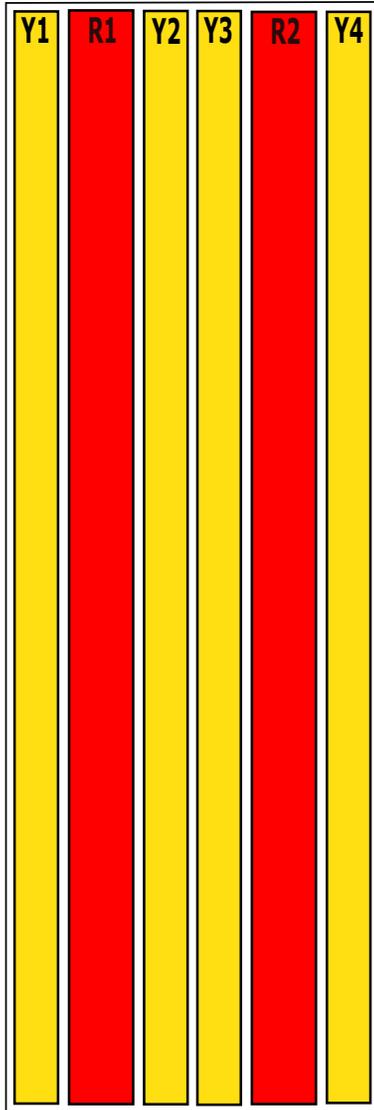
**RET placement
as viewed from rear
of antenna**

Top of antenna

MM.1

MM.2   MM.3
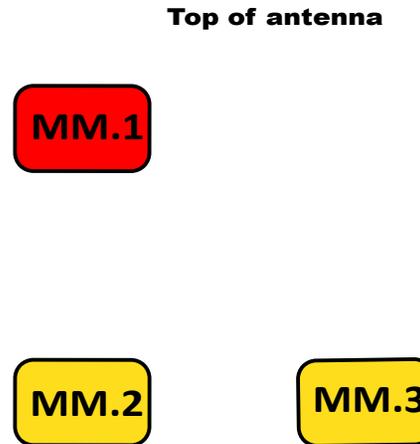
Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-896	1, 2, 3, 4	CIxxxxxxMM.1
R2	3, 4	698-896		
Y1	5, 6	1695-2400	5, 6, 7, 8	CIxxxxxxMM.2
Y2	7, 8	1695-2400		
Y3	9, 10	1695-2400	9, 10, 11, 12	CIxxxxxxMM.3
Y4	11, 12	1695-2400		