
TPA65R-KE9DA (Type 17 RET Configuration Only)



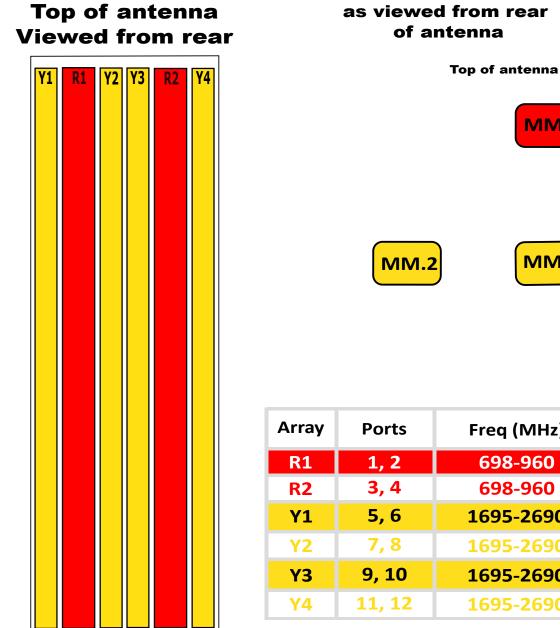

RET placement as viewed from rear of antenna

MM.1

MM.3



Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-960	1, 2, 3, 4	CIxxxxxMM.1
R2	3, 4	698-960		
Y1	5, 6	1695-2690	5, 6, 7, 8	ClxxxxxMM.2
Y2	7, 8	1695-2690		
Y3	9, 10	1695-2690	9, 10, 11, 12	ClxxxxxMM.3
Y4	11, 12	1695-2690		