




# Antennas

DATA SHEET

## Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA

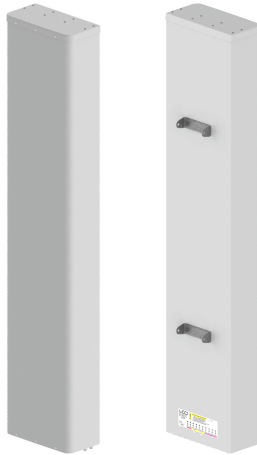

- Eight foot (2.4 m), Hybrid Multiband Beamforming Antenna, deploying a high performing 65° azimuth beamwidth covering 614-896 MHz/1695-2690 MHz frequencies and an 8T8R Beamforming array covering 3300-4200 MHz
- Four wide low band ports covering 614-896 MHz, Eight wide mid band ports covering 1695-2690 MHz and Eight wide high band ports covering 3300-4200 MHz, in a single antenna
- Full Spectrum Compliance for 614-896 MHz/1695-2690 MHz/3300-4200 MHz
- Provides an 8T8R Beamforming array, with a calibration port, for RRU controlled Azimuth beam control and beamforming, for increased 5G services data throughput and decreased latency, by minimizing interference and increasing signal strength at directed users
- Beamforming array can be deployed with tapering (or without tapering), for improved Azimuth SLL performance
- LTE Optimized FBR, SPR and Boresight/Sector XPD Performance, essential for today's LTE Data Networks
- Exceeds minimum PIM performance requirements
- Equipped with 4.3-10 connectors
- Equipped with four RET-T17iG3-M, internal integrated AISG 2.0 compliant (upgradable to AISG 3.0 when available) Remote Electrical Tilt (RET) Actuators

### Overview

The CCI Hybrid Multiband Array with 3.5GHz 8T8R Support is a Twenty port antenna, with Four wide low band ports covering 614-896 MHz, Eight wide mid band ports covering 1695-2400 MHz and Eight wide high band ports covering 3700-4000 MHz. The CCI Hybrid Multiband Array with 3.5GHz 8T8R Support uses a high performance 65° azimuth beamwidth in the low band and mid band frequencies and an 8T8R Beamforming array in the high band frequencies.

The CCI Hybrid Multiband Beamforming Antenna provides the capability to deploy a Single 4x4 Multiple-input Multiple-output in the low band, Dual 4x4 Multiple-input Multiple-output (MIMO) in the mid band and 8T8R Beamforming in the high band. The CCI Hybrid Multiband Beamforming Antenna utilizes four RET-T17iG3-M, internal RET actuators, through one external AISG input/output interface. One RET actuator for the Low Band ports, two RET actuators in the Mid Band ports and one RET actuator for the 8T8R Beamforming ports.

The CCI Hybrid Multiband Beamforming Antenna, will allow operators to reduce OPEX and CAPEX costs, by having a high performing 8T8R array, in a Twelve port 65° multiband array, all within a single antenna enclosure.

CCI antennas are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

### Applications

- 8T8R Beamforming in 3.5 GHz, with calibration port
- Single 4X4 MIMO Low Band ports and Dual 4x4 MIMO for the Mid Band ports
- With CCI's Hybrid Multiband Beamforming Antennas, wireless providers can connect multiple platforms to a single antenna, reducing tower load, lease expense, deployment time and installation costs



# Antennas

## SPECIFICATIONS

### Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA

#### Electrical

Ports	4 x Low Band Ports for 614-896 MHz		
Frequency Range	614-698 MHz	698-806 MHz	824-896 MHz
Gain <sup>1</sup>	14.2 dBi	15.2 dBi	15.9 dBi
Gain (Average) <sup>2</sup>	13.0 dBi	14.2 dBi	15.1 dBi
Azimuth Beamwidth (-3dB)	84°	68°	56°
Elevation Beamwidth (-3dB)	11.7°	9.9°	8.3°
Electrical Downtilt	2° to 12°	2° to 12°	2° to 12°
Elevation Sidelobes (1st Upper)	<-16 dB	<-17 dB	<-18 dB
Front-to-Back Ratio @180°	> 32 dB	> 35 dB	> 34 dB
Front-to-Back Ratio ±20°	> 28 dB	> 30 dB	> 30 dB
Cross-Polar Discrimination at Peak	> 25 dB	> 25 dB	> 25 dB
Cross-Polar Port-to-Port Isolation	> 25 dB	> 25 dB	> 25 dB
Voltage Standing Wave Ratio (VSWR)	< 1.5:1		
Passive Intermodulation (2x20W)	≤ -153 dBc		
Input Power Continuous Wave (CW)	500 watts		
Polarization	Dual Linear 45°		
Input Impedance	50 ohms		
Lightning Protection	DC Ground		

<sup>1</sup>Peak gain across sub-bands.

<sup>2</sup>Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.

Ports	8 x Mid Band Ports for 1695-2690 MHz				
Frequency Range	1695-1880 MHz	1850-1990 MHz	1920-2180 MHz	2300-2400 MHz	2496-2690 MHz
Gain <sup>1</sup>	17.5 dBi	18.1 dBi	18.2 dBi	18.1 dBi	17.8 dBi
Gain (Average) <sup>2</sup>	16.1 dBi	16.8 dBi	17.2 dBi	17.2 dBi	16.5 dBi
Azimuth Beamwidth (-3dB)	73°	69°	64°	58°	67°
Elevation Beamwidth (-3dB)	5.7°	5.1°	4.8°	4.1°	4.0°
Electrical Downtilt	0° to 8°	0° to 8°	0° to 8°	0° to 8°	0° to 8°
Elevation Sidelobes (1st Upper)	<-17 dB	<-17 dB	<-17 dB	<-15 dB	<-16 dB
Front-to-Back Ratio @180°	> 35 dB	> 35 dB	> 35 dB	> 35 dB	> 35 dB
Front-to-Back Ratio ±20°	> 31 dB	> 32 dB	> 32 dB	> 32 dB	> 32 dB
Cross-Polar Discrimination at Peak	> 17 dB	> 18 dB	> 21 dB	> 22 dB	> 21 dB
Cross-Polar Port-to-Port Isolation	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB
Voltage Standing Wave Ratio (VSWR)	< 1.5:1				
Passive Intermodulation (2x20W)	≤ -153 dBc				
Input Power Continuous Wave (CW)	300 watts				
Polarization	Dual Linear 45°				
Input Impedance	50 ohms				
Lightning Protection	DC Ground				

<sup>1</sup>Peak gain across sub-bands.

<sup>2</sup>Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1.



# Antennas

## SPECIFICATIONS

### Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA

#### Electrical

Ports	8 x High Band Ports for 3300-4200 MHz			
	Single Column			
Frequency Range	3300-3400 MHz	3450-3650 MHz	3700-4000 MHz	4000-4200 MHz
Gain <sup>1</sup>	14.6 dBi	15.6 dBi	16.0 dBi	16.0 dBi
Gain (Average) <sup>2</sup>	13.8 dBi	14.3 dBi	14.9 dBi	14.8 dBi
Azimuth Beamwidth (-3dB)	79°	74°	71°	65°
Elevation Beamwidth (-3dB)	8.3°	7.8°	7.1°	6.5°
Electrical Downtilt	2° to 12°	2° to 12°	2° to 12°	2° to 12°
Elevation Sidelobes (1st Upper)	< -16 dB	< -17 dB	< -17 dB	< -16 dB
Front-to-Back Ratio @180°	> 32 dB	> 32 dB	> 35 dB	> 33 dB
Front-to-Back Ratio ±20°	> 27 dB	> 26 dB	> 28 dB	> 27 dB
Cross-Polar Discrimination at Peak	> 19 dB	> 18 dB	> 19 dB	> 21 dB
CoPol Isolation between Columns	> 18 dB	> 25 dB	> 25 dB	> 25 dB
Cross-Polar Isolation	> 18 dB	> 25 dB	> 25 dB	> 25 dB
Coupling level, antenna port to cal port	26 ±2			
Max Amplitude difference between antenna ports and Cal port (dB)	< ±1			
Max phase difference between antenna ports and Cal port (deg)	< ±7			
Voltage Standing Wave Ratio (VSWR)	< 1.5:1			
Passive Intermodulation (2x20W)	≤ -153 dBc			
Input Power Continuous Wave (CW)	100 watts			
Polarization	Dual Linear 45°			
Input Impedance	50 ohms			
Lightning Protection	DC Ground			

<sup>1</sup>Peak gain across sub-bands.

<sup>2</sup>Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1

Ports	Broadcast and Service Beams			
	Broadcast		Service Beam at 0°*	
Frequency Range	3300-3650 MHz	3700-4200 MHz	3300-3650 MHz	3700-4200 MHz
Gain <sup>1</sup>	16.4 dBi	17.0 dBi	20.0 dBi	20.8 dBi
Gain (Average) <sup>2</sup>	15.3 dBi	15.8 dBi	19.2 dBi	19.9 dBi
Azimuth Beamwidth (-3dB)	67° ±14°	61° ±15°	27° ±2.7°	23° ±0.9°
Elevation Beamwidth (-3dB)	8.3°	7.1°	8.0°	6.9°
Electrical Downtilt	2° to 12°	2° to 12°	2° to 12°	2° to 12°
Elevation Sidelobes (1st Upper)	< -19 dB	< -17 dB	< -20 dB	< -18 dB
Front-to-Back Ratio @180°	> 35 dB	> 34 dB	> 40 dB	> 40 dB
Front-to-Back Ratio ±20°	> 28 dB	> 28 dB	> 32 dB	> 32 dB

<sup>1</sup>Peak gain across sub-bands.

<sup>2</sup>Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1

\*Performance is based on no tapering applied.



# Antennas

## SPECIFICATIONS Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA

### Electrical

Ports	Service Beams			
	Service Beam at 30°*		Service Beam Soft Bisector	
Frequency Range	3300-3650 MHz	3700-4200 MHz	3300-3650 MHz	3700-4200 MHz
Gain <sup>1</sup>	18.3 dBi	19.5 dBi	18.7 dBi	20.0 dBi
Gain (Average) <sup>2</sup>	17.7 dBi	18.4 dBi	17.8 dBi	18.5 dBi
Azimuth Beamwidth (-3dB)	32° ±2.4°	28° ±5.0°	33° ±4.4°	29° ±5.8°
Elevation Beamwidth (-3dB)	5.5°	5.6°	7.8°	6.8°
Electrical Downtilt	2° to 12°	2° to 12°	2° to 12°	2° to 12°
Elevation Sidelobes (1st Upper)	<-18 dB	<-18 dB	<-20 dB	<-18 dB
Front-to-Back Ratio @180°	> 40 dB	> 40 dB	> 36 dB	> 36 dB
Front-to-Back Ratio ±20°	> 35 dB	> 38 dB	> 32 dB	> 32 dB

<sup>1</sup>Peak gain across sub-bands.

<sup>2</sup>Electrical specifications follow document "Recommendation on Base Station Antenna Standards" (BASTA) V11.1

\*Performance is based on no tapering applied.

### Mechanical

Dimensions (LxWxD)	96.0x19.5x9.6 in (2438x496x245 mm)
Survival Wind Speed	> 150 mph (> 241 kph)
Front Wind Load	293 lbs (1303 N) @ 100 mph (161 kph)
Side Wind Load	113 lbs (503 N) @ 100 mph (161 kph)
Equivalent Flat Plate Area	11.8 ft <sup>2</sup> (1.1 m <sup>2</sup> )
Weight *	102.7 lbs (46.6 kg)
RF Connector	20 x 4.3-10 female
Calibration Interface	1 x 4.3-10 female
RET Connectors	1 female / 1 male
RET Interface	8-pin D female / 8-pin D male
Mounting Pole	2 to 5 in (5 to 12 cm)

\* Weight excludes mounting kit



# Antennas

## SPECIFICATIONS


### Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA

#### Mechanical


Bottom View

12HBF4R-TEH8NA

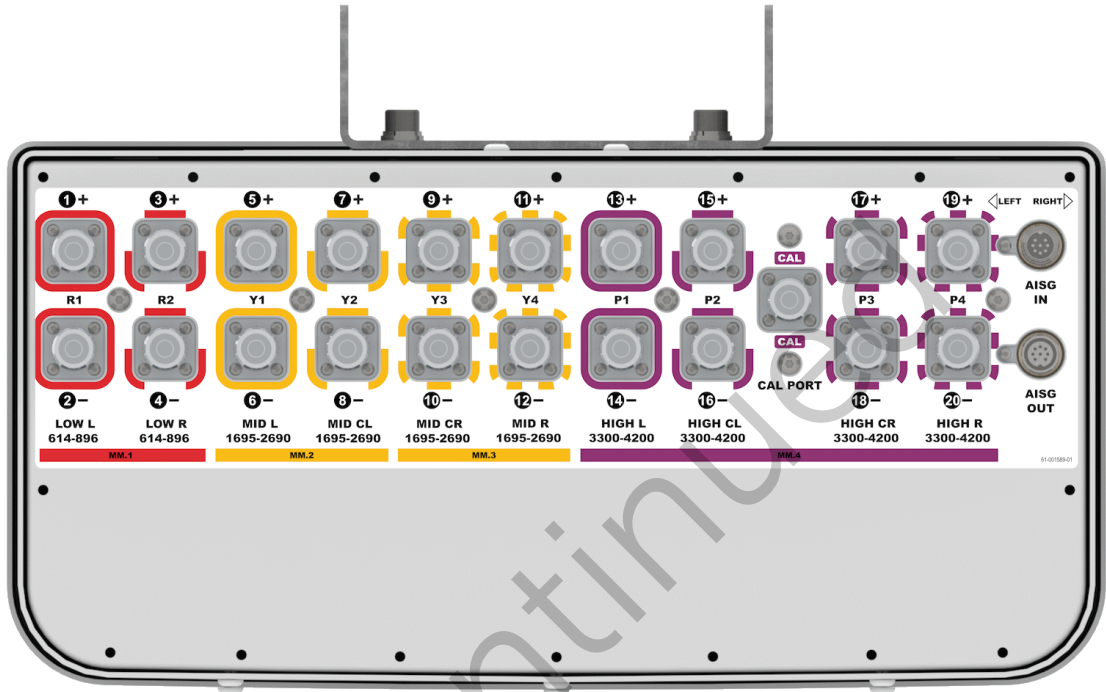

#### Connector Spacing

12HBF4R-TEH8NA

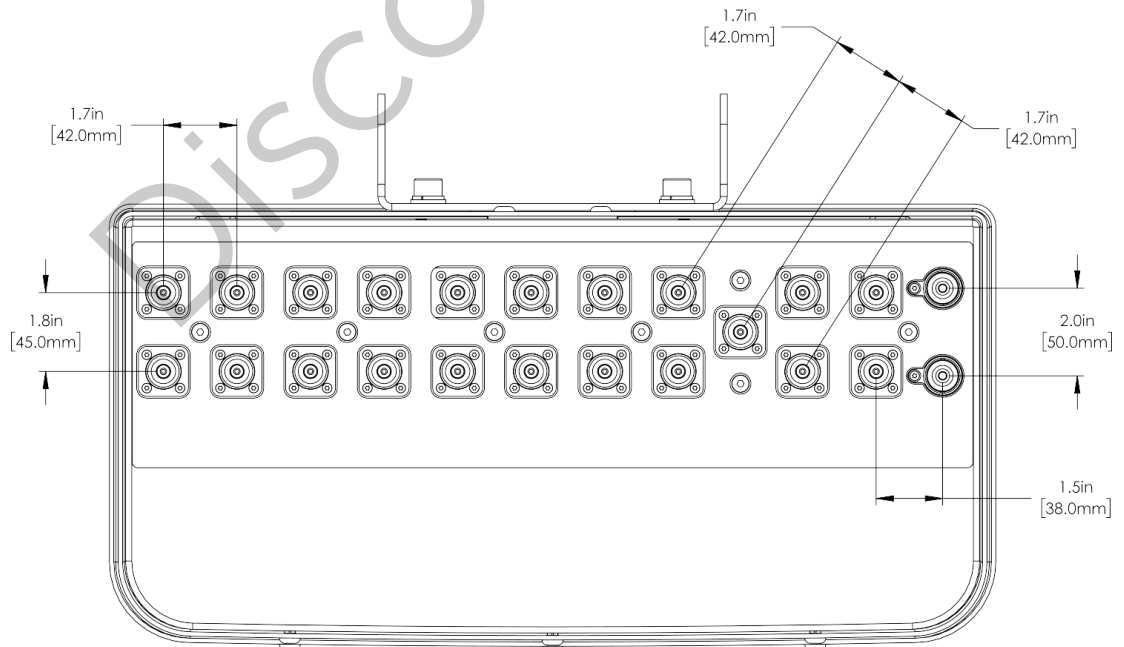



# Antennas

## SPECIFICATIONS

### Hybrid Multiband Beamforming Antenna


12HBF4R-TEH8NA

#### Mechanical

RET to Element Configuration

12HBF4R-TEH8NAA Element and RET configuration (Type 17IG3-M RET)


**Top of antenna  
Viewed from rear**

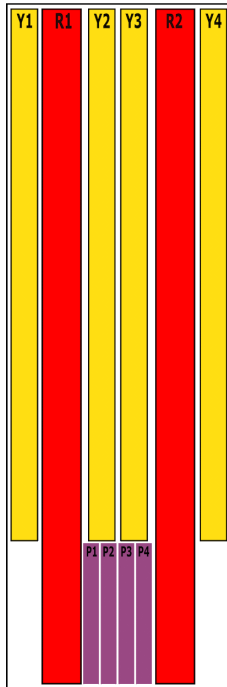


Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	614-896	1, 2, 3, 4	C1xxxxxMM.1
R2	3, 4	614-896		
Y1	5, 6	1695-2690	5, 6, 7, 8	C1xxxxxMM.2
Y2	7, 8	1695-2690		
Y3	9, 10	1695-2690		
Y4	11, 12	1695-2690	9, 10, 11, 12	C1xxxxxMM.3
P1	13, 14	3300-4200	13, 14, 15, 16, 17, 18, 19, 20	C1xxxxxMM.4
P2	15, 16	3300-4200		
P3	17, 18	3300-4200		
P4	19, 20	3300-4200		

#### Typical Antenna Patterns

For detailed information on additional antenna patterns, contact customer support at [support@cciproducts.com](mailto:support@cciproducts.com)

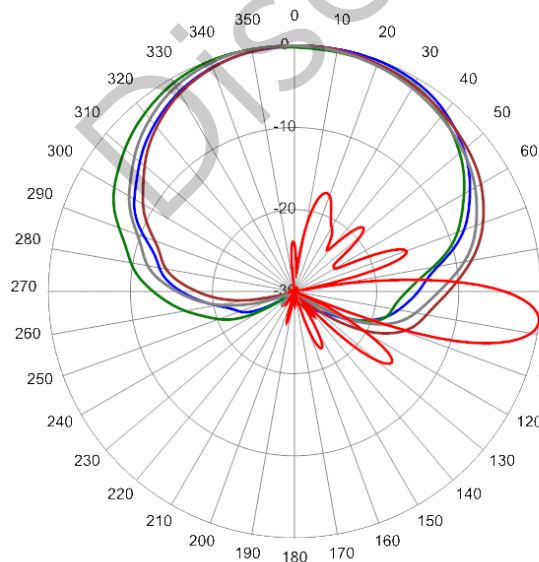

645 MHz Azimuth with Elevation 7°

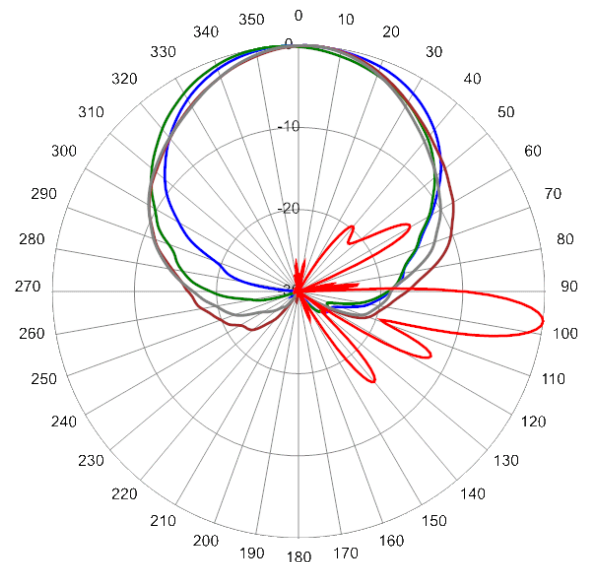

880 MHz Azimuth with Elevation 7°




# Antennas


SPECIFICATIONS

Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA

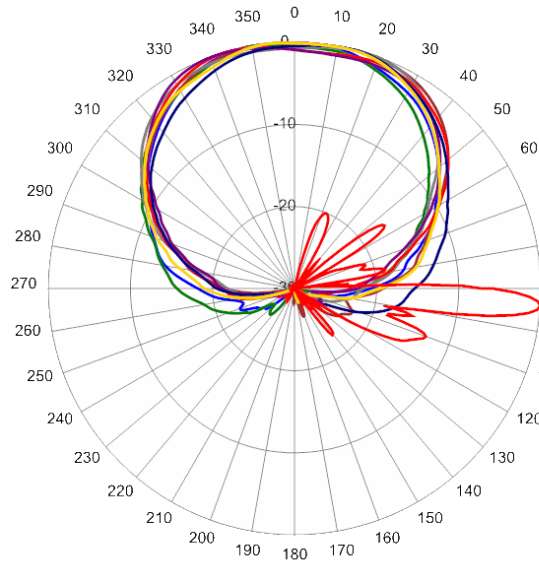


1800 MHz Azimuth with Elevation 4°

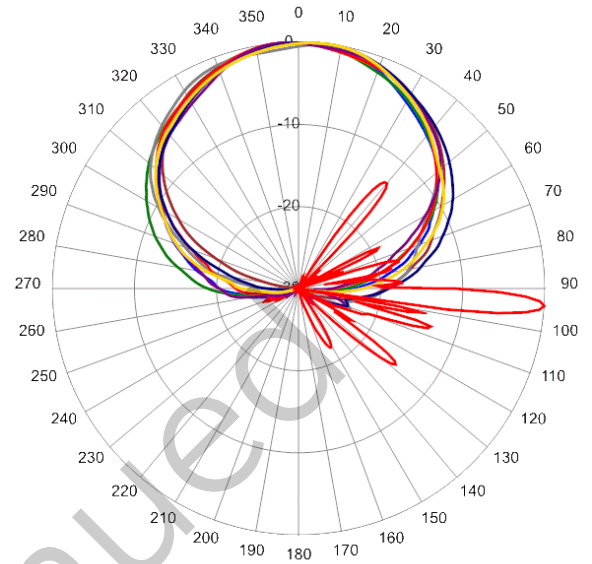


2180 MHz Azimuth with Elevation 4°

Typical Antenna Patterns

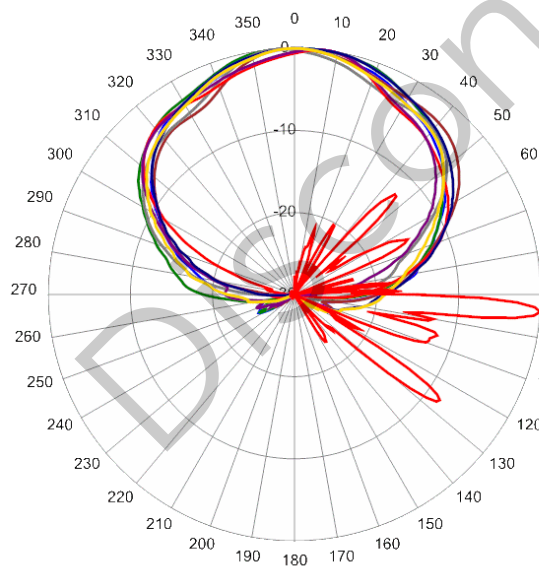

2360 MHz Azimuth with Elevation 4°

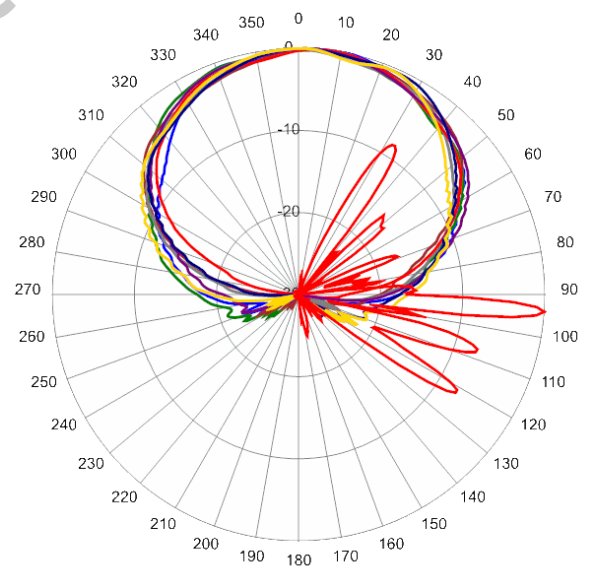

2650 MHz Azimuth with Elevation 4°




# Antennas


## SPECIFICATIONS

### Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA

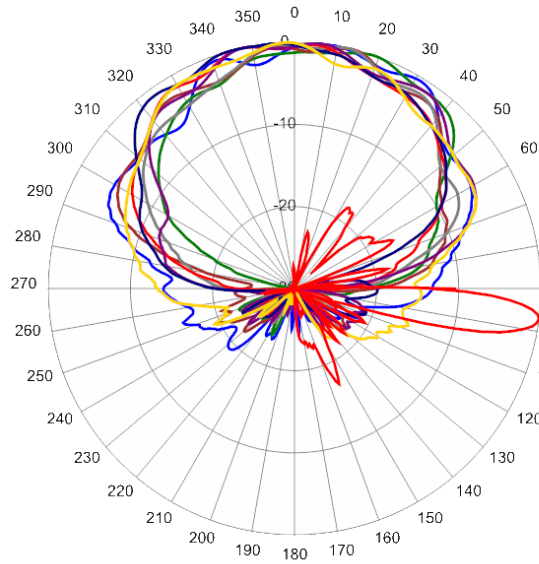

360 MHz Azimuth with Elevation 7° Single Column

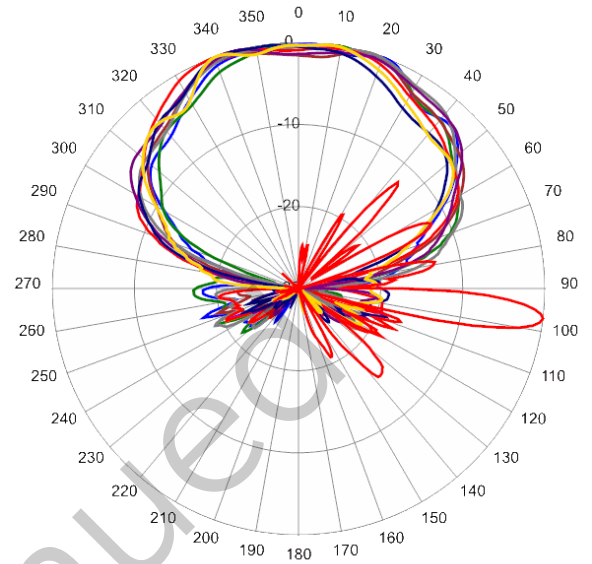

4000 MHz Azimuth with Elevation 7° Single Column

Discontinued






# Antennas

## SPECIFICATIONS


### Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA


#### Typical Antenna Patterns

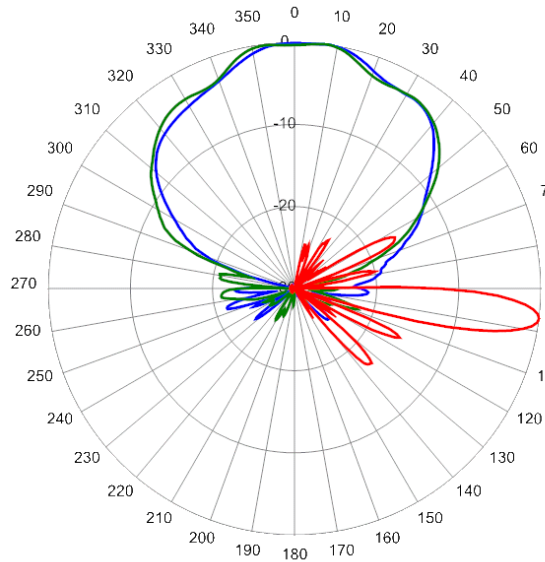


360 MHz Azimuth with Elevation 7° Broadcast Beam

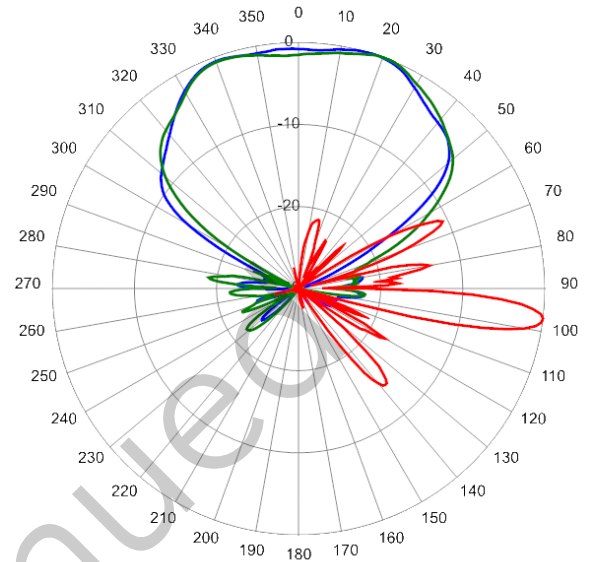

4000 MHz Azimuth with Elevation 7° Broadcast Beam

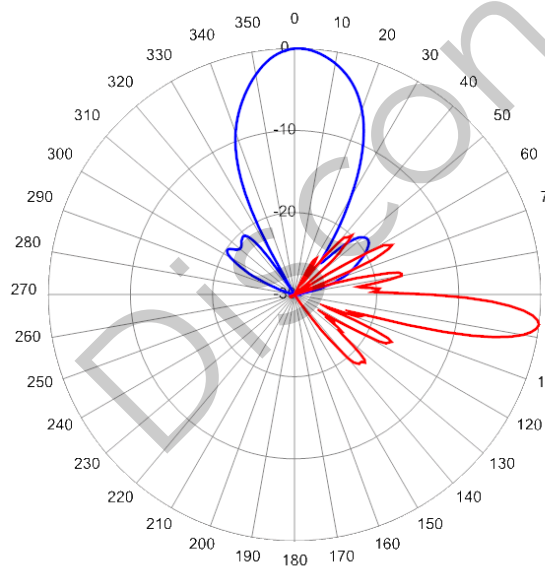

360 MHz Azimuth with Elevation 7° Service Beam

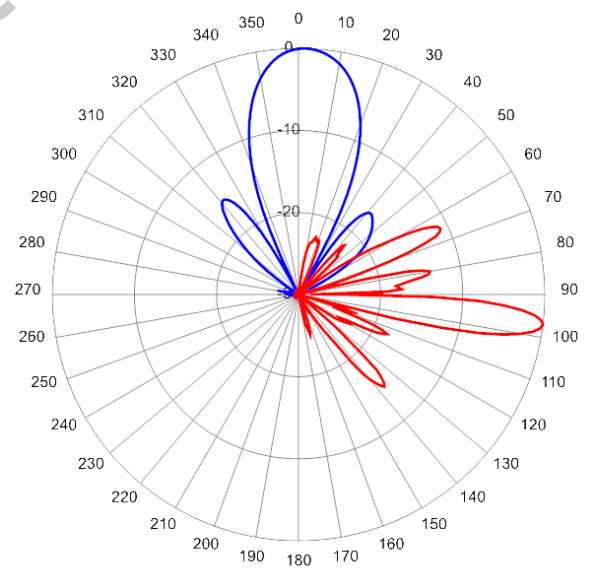

4000 MHz Azimuth with Elevation 7° Service Beam




# Antennas

## SPECIFICATIONS


### Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA


#### Typical Antenna Patterns

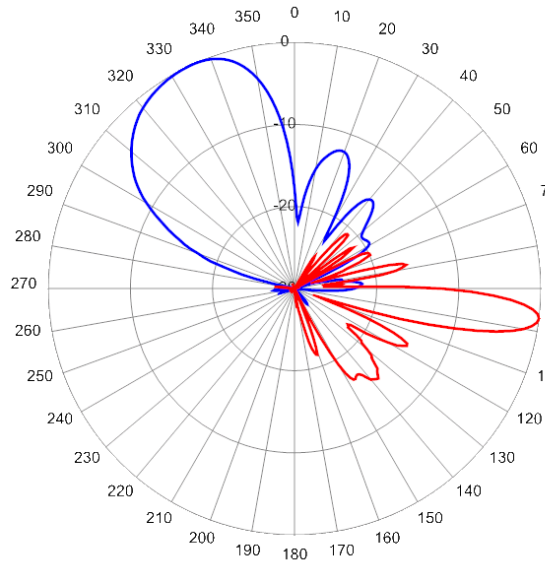


3600 MHz Azimuth with Elevation 7° Service Beam

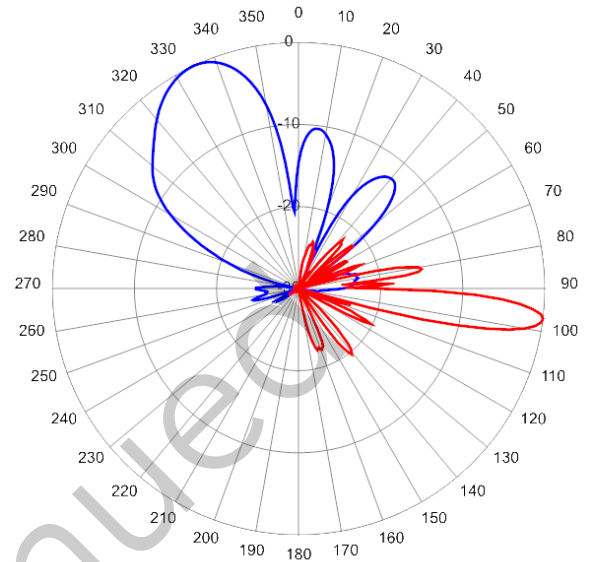

4000 MHz Azimuth with Elevation 7° Service Beam

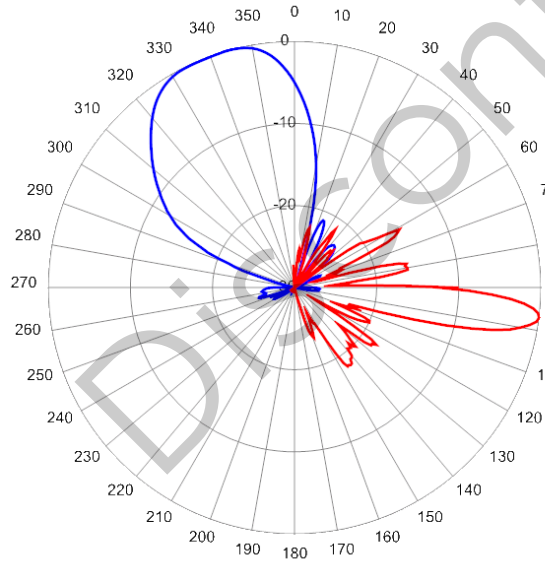

3600 MHz Azimuth with Elevation 7° Soft Split

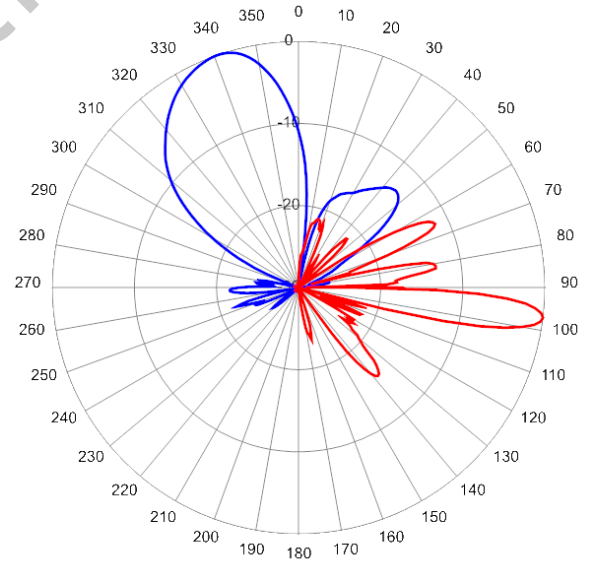

4000 MHz Azimuth with Elevation 7° Soft Split

For detailed information on additional antenna patterns, contact customer support at [support@cciproducts.com](mailto:support@cciproducts.com)



# Antennas

ORDERING

Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA

Parts & Accessories

- 12HBF4R-TEH8NAA-K** Eight foot (2.4 m), Hybrid Multiband Beamforming Antenna, 4.3-10 female connectors, 4 factory RET-T17iG3-M actuators and MBK-01 mounting bracket
- MBK-16** Mounting bracket kit (top and bottom) with fixed 0° mechanical tilt
- MBK-01** Mounting bracket kit (top and bottom) with 0° to 10° mechanical tilt adjustment
- AISGC-M-F-10FT** 10 Ft (3 m) Male/Female RRU to Antenna AISG cable

Discontinued



# Antennas



ACCESSORIES

## Mounting Bracket Kit

MBK-16

Mechanical

<b>Weight</b>	9.9 lbs (4.5 kg)
<b>Hinge Pitch</b>	47.25 in (1200 mm)
<b>Mounting Pole Dimension</b>	2 to 5 in (5 to 12 cm)
<b>Fastener Size</b>	M12
<b>Installation Torque</b>	40 ft·lbs (54 N·m)
<b>Mechanical Tilt</b>	0°

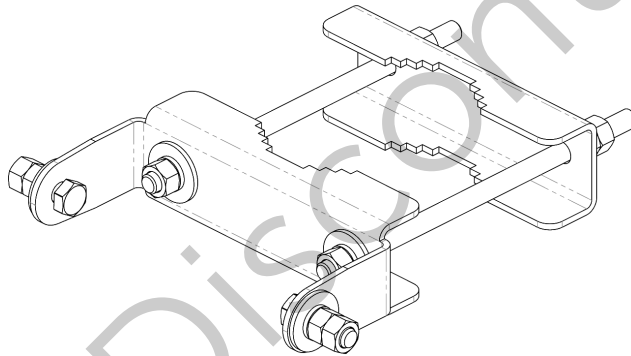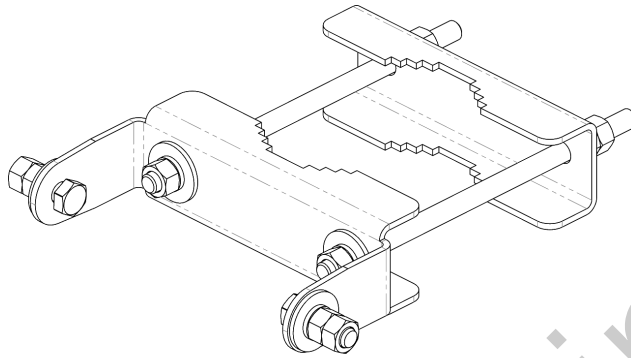

MBK-16 Top and Bottom Bracket



# Antennas


ACCESSORIES

## Mounting Bracket Kit


MBK-01

Mechanical


<b>Weight</b>	12.6 lbs (5.7 kg)
<b>Hinge Pitch</b>	47.25 in (1200 mm)
<b>Mounting Pole Dimension</b>	2 to 5 in (5 to 12 cm)
<b>Fastener Size</b>	M12
<b>Installation Torque</b>	40 ft·lb (54 N·m)
<b>Mechanical Tilt Adjustment</b>	0° - 10°



MBK-01 Top Adjustable Bracket

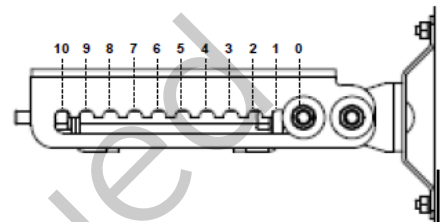

MBK-01 Top Adjustable Bracket Side View



MBK-01 Bottom Fixed Bracket

Discontinued



# Antennas

ACCESSORIES

AISG Cable



AISGC-M-F-xFT

## Electrical Specifications

Individual Cable Part Number	AISGC-M-F-x(FT)
Cable style	UL2464
Protocol	AISG 1.1 and AISG 2.0
Maximum voltage	300 V
Rated current	5 A at 104° F (40° C)

## Mechanical Specifications

Individual Cable Part Number	AISGC-M-F-x(FT)
Cables per kit	1
Connectors	2 x 8 pin IEC 60130-9 Straight male/straight female
Tightening torque	Hand tighten only $\approx$ 1.84 ft-lbs (2.5 Nm)
Construction	Shielded (Tinned Copper Braid)
Braid coverage	85%
Jacket Material	Matte Polyurethane (Black)
Conductors	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464
Cable Diameter	0.307 in (7.8 mm)
Length	See order details
Minimum bend radius	3.15 in (80 mm)

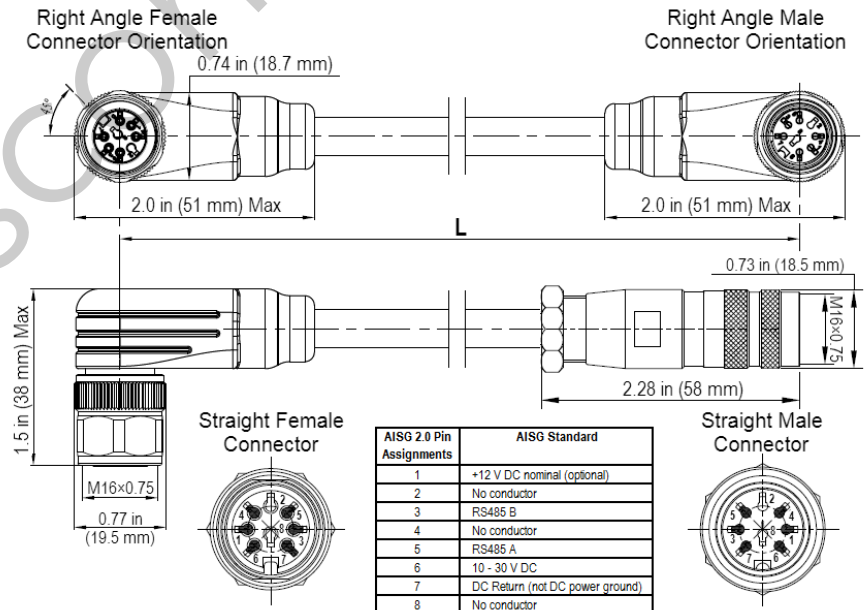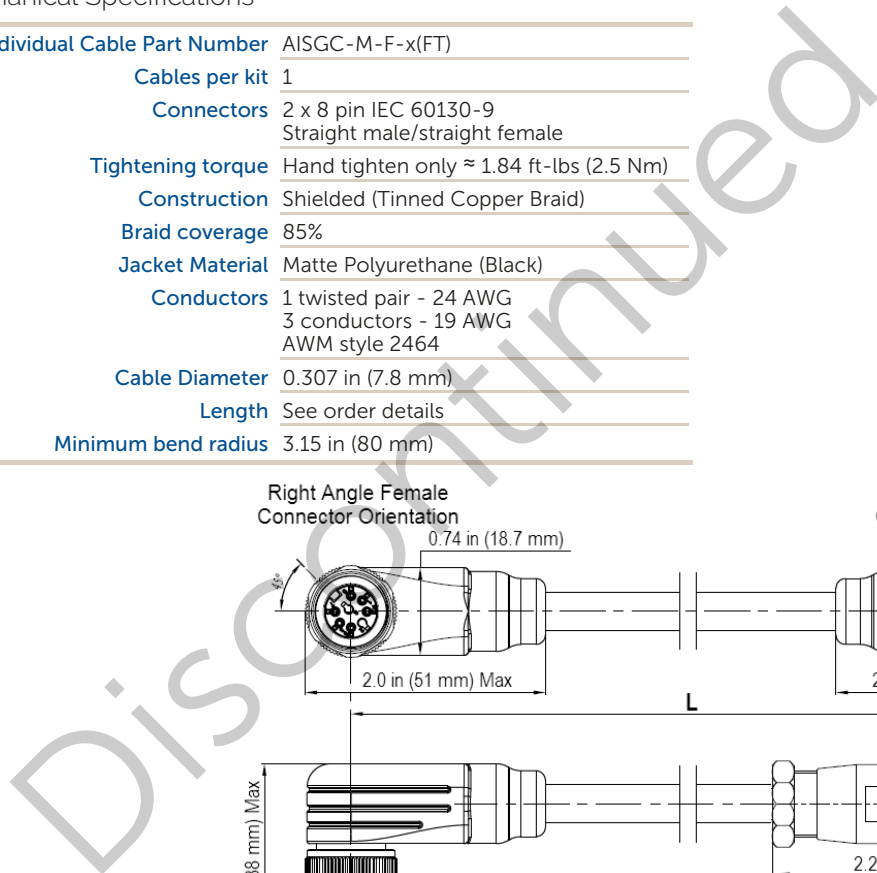

AISG-Male to AISG-Female Jumper Cable



# Antennas

ACCESSORIES

AISG Cable

AISGC-M-F-xFT

Environmental Specifications

Individual Cable Part Number	AISGC-M-F-xFT
Temperature Range	-40° to 80° C
Flammability	UL 1581 VW-1
Ingress Protection	IEC 60529:2001, IP67

Discontinued



# Antennas

## STANDARDS & CERTIFICATIONS

### Hybrid Multiband Beamforming Antenna

12HBF4R-TEH8NA

#### Standards & Compliance

<b>Safety</b>	EN 60950-1, UL 60950-1
<b>Emission</b>	EN 55022
<b>Immunity</b>	EN 55024
<b>Environmental</b>	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, GR-63-CORE 4.3.1, EN 60529, IP 24

#### Certifications

Antenna Interface Standards Group (AISG), Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001

