



Antennas

DATA SHEET

AISG Cable Kit

CBK-RA-AG-RRU-002



- AISG 1.1 and 2.0 compliant control cables
- Offset keying for right angle cables
- IP67 outdoor ingress protection (when properly mated)
- Flame retardant per UL 1581 VW-1
- Matte polyurethane jacket (Black)
- Connectors 2 x 8 pin (male/female) per IEC 60130-9
- Tinned copper braid shield material

Overview

CCI's Two RET antenna to remote radio unit (RRU) AISG Cable Kits provides all the required cables for the successful deployment of CCI's models that have larger Remote Electrical Tilt (RET) actuators spacing then normal. All of the control cables included in the kit are AISG 1.1 and AISG 2.0 compliant.

AISG control can be configured in several ways. Depending on your requirements, a single RRU can be designated as the AISG controller whereby it controls both the high band ports and low band ports of the antenna. Another configuration will allow a low band RRU to control the low band antenna ports and a high band RRU to control the high band ports of the antenna. The AISG cable kit provides all the necessary cables to enable both of the above configurations. The 10 foot AISG cables enable connection from the RRU to the antenna, while the 31" AISG cable is for daisy chaining between RET actuators.



Antennas

SPECIFICATIONS


AISG Cable Kit

CBK-RA-AG-RRU-002

Electrical/Mechanical/Environmental Specifications

	RET to RET Cables	RRU to Antenna Cables
Individual Cable Part Number	AISGC-MRA-FRA-31	AISGC-M-FRA-10FT
Cable style	UL2464	
Protocol	AISG 1.1 and AISG 2.0	
Maximum voltage	300 V	
Rated current	5 A at 104° F (40° C)	
Temperature Range	-40° to 80° C	
Flammability	UL 1581 VW-1	
Ingress Protection	IEC 60529:2001, IP67	
Tightening torque	Hand tighten only \approx 1.84 ft-lbs (2.5 N·m)	
Construction	Shielded (Tinned Copper Braid)	
Braid coverage	85%	
Jacket Material	Matte Polyurethane (Black)	
Conductors	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464	
Cable Diameter	0.307 in (7.8 mm)	
Minimum bend radius	3.9 in (100 mm)	
Connectors	2 x 8 pin IEC 60130-9 Right angle male/right angle female	2 x 8 pin IEC 60130-9 Straight male/right angle female
Length	31 in (787 mm)	120 in (3048 mm)
Weight	0.25 lbs (0.11 kg)	0.77 lbs (0.35 kg)
Cables per kit	1	2

Mechanical Specifications

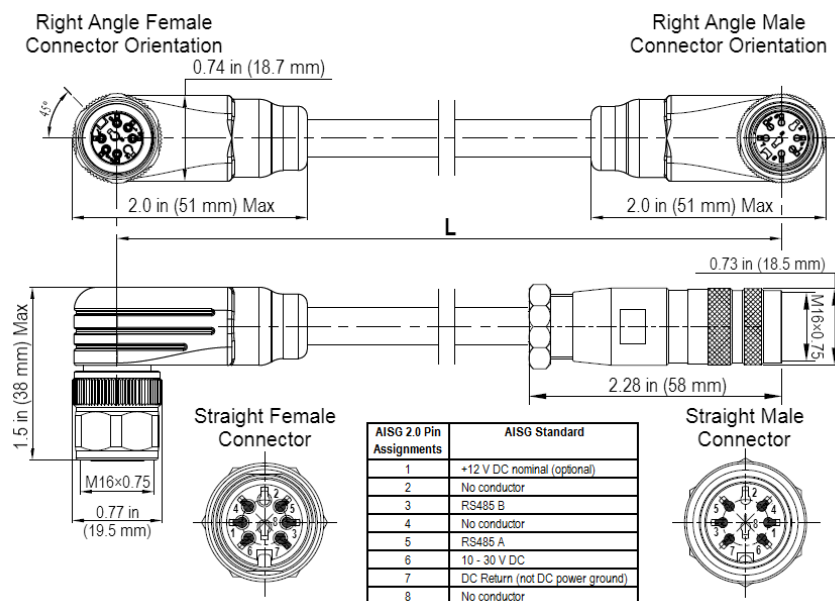

Right Angle to Right Angle and Right Angle to Straight Jumper Cable



Antennas

ORDERING

AISG Cable Kit

CBK-RA-AG-RRU-002

Parts & Accessories

Kit Part Number	CBK-RA-AG-RRU-002
Number of Cables	3
Overall Length	271 in (6883 mm)
Overall Weight	1.8 lbs (0.8 kg)